

GRAB A COFFEE: FUTURE-AWARE GUIDANCE FOR DISCRETE DIFFUSION WITH COMPILED OBJECTIVES

Hua (Edward) XU^{1,*}, Dongxin Li^{1,*}, Gwen Yidou-Weng²,
Guy Van den Broeck², Wei Wang¹, Anji Liu³

¹Data Science and Analytics Thrust,

The Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

²Department of Computer Science, University of California, Los Angeles, USA

³School of Computing, National University of Singapore, Singapore

*Equal contribution.

ABSTRACT

Discrete diffusion models generate sequences by iteratively resolving multiple tokens in parallel, offering a flexible alternative to left-to-right generation. However, guiding this process with a sequence-level objective is difficult because the value of one unresolved token depends on the other tokens with which it can form a high-reward sequence. Enumerating all such completions makes the whole guidance computation grow exponentially with the number of unresolved positions. We introduce COFFEE, a plug-and-play framework that avoids this enumeration by separating sequence dependence from the objective. At each diffusion step, a target-free carrier absorbs the marginal token distributions predicted by the denoiser to construct a joint model over the unresolved tokens, while a compiled finite-state model records how their combinations affect the sequence-level preference. Pairing their states allows COFFEE to transfer global preferences to unresolved positions and sample a clean reconstruction without retraining the diffusion model. The same framework supports explicit hard constraints and learned soft objectives. We evaluate COFFEE across multiple symbolic, language, and biological benchmarks, where it achieves strong control results with task-dependent quality and diversity trade-offs. By making objectives available to inference rather than only evaluation, COFFEE brings joint conditioning, completion-weighted guidance, and optimization-based constraints into pretrained neural generation, showing the potential of neural-symbolic methods in diffusion guidance.

1 INTRODUCTION

Discrete diffusion models offer a flexible approach to generating language and biological sequences (Nie et al., 2025; Ye et al., 2025; Yang et al., 2026). By repeatedly reconstructing tokens from corrupted inputs, they allow multiple positions to be predicted together using context from either side of the sequence. In many applications, however, generating plausible samples is only a starting point: the output should also satisfy a constraint, express a desired attribute, or achieve a high sequence-level reward.¹ Inference-time guidance offers a way to introduce these objectives without retraining the pretrained generator. The challenge is to turn a preference over complete sequences into useful guidance while the current state is still partially corrupted. Consider the masked sentence [MASK] [MASK] is in [MASK] in Fig. 1, with a preference for the phrase *New York*. The preference concerns the term *New York* together, but a scorer itself without knowing joint distribution of tokens does not specify how the unresolved tokens should be chosen jointly. Directly sampling from the distributions given by the denoiser may produce mismatched combinations such as *New Kong*, failing to capture cross-token dependence. The scorer’s preference may also affect the distributions at other positions, ideally coupling the preferred term with *USA*, though the scorer itself may not be able to associate them together. Therefore, using such reward to guide the generation process requires a joint model which can couple these choices and propagate the phrase preference to the country

¹In this paper, we are using “reward”, “condition”, “constraint” and “preference” interchangeably.

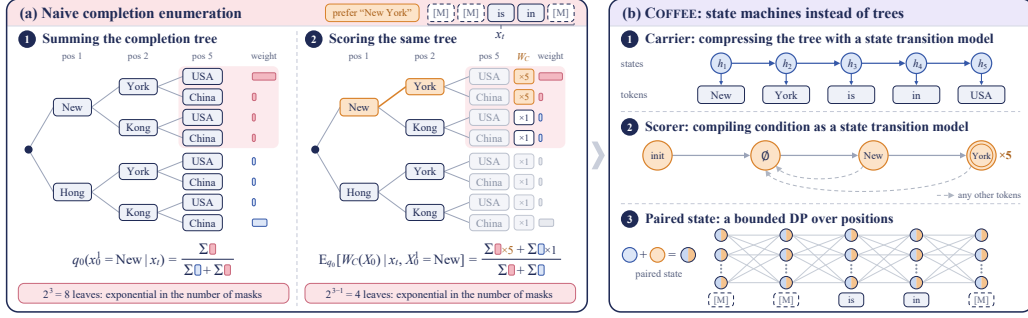


Figure 1: **Sequence-level guidance combines preferences with a model of possible completions.** (a) Each root-to-leaf path specifies a clean reconstruction with neutral completion weights given by q_0 . With two token choices at each of three unresolved positions, explicit enumeration produces 2^3 leaves. Calculating quantities in Eq. 1 with such way is therefore hard with exponential complexity. (b) COFFEE uses state machines to represent token dependence and record pattern progress. Their product permits histories reaching the same state at the same position to share a continuation calculation, replacing path-by-path enumeration within the compiled model.

prediction through the association between New York and USA, even though the scorer does not directly reward the country. Effective guidance therefore needs to account for both *how token choices depend on one another* and *how their combinations affect the sequence-level objective*.

More generally, let x_t denote the current diffusion state and x_0 a possible clean reconstruction. Given a neutral, unguided distribution $q_0(x_0 | x_t)$ which models the joint token distribution before imposing condition C , and a nonnegative sequence weight $W_C(x_0)$ indicating sequence-level preference, for a candidate token u at an unresolved position i , we consider the guided reconstruction distribution

$$q_C(x_0^i = u | x_t) \propto q_0(x_0^i = u | x_t) \mathbb{E}_{q_0}[W_C(X_0) | x_t, X_0^i = u]. \quad (1)$$

Our goal is to sample from q_C , which brings two computation challenges. **(1)** The expectation depends on how unresolved tokens occur together, i.e. the joint distribution q_0 , whereas a single denoiser can only provide the factorized approximation $\prod_{i \in \mathcal{M}_t} p_\theta(x_0^i | x_t)$ that does not by itself specify these dependencies. With unresolved positions $\mathcal{M}_t$, naively computing the joint requires $|\mathcal{V}|^{|\mathcal{M}_t|}$ operations over vocabulary $\mathcal{V}$. **(2)** Even with access to $q_0(x_0 | x_t)$, evaluating the expectation of W_C still requires scoring the sequence-level preference over all possible completions separately, which also requires $|\mathcal{V}|^{|\mathcal{M}_t|}$ operations (Fig. 1(a)). The problem is thus not simply to score a completed sequence, but **to obtain coupling token choices** per diffusion step and **to evaluate sequence-level preferences** while the current state is still partially corrupted.

Existing diffusion-guidance methods approach control through several routes, including attribute estimates on noisy inputs (Nisonoff et al., 2025; Schiff et al., 2025) and clean-sample search that evaluates rewards on completed sequences and iteratively refines them (Phunyaphibarn & Sung, 2026). These methods provide ways to use sequence-level objectives during generation. A separate line of work restores the cross-position dependence absent from factorized denoiser outputs. CoDD, for example, augments parallel diffusion predictions with a joint model (Li et al., 2026). Together, these directions provide the two ingredients needed by the example above: a sequence-level preference and a model of how token choices depend on each other.

We then introduce COFFEE, a plug-and-play inference-time guidance framework based on graphical models. A target-free graphical model, called the *dependence carrier*, is used to capture the joint dependency with diffusion outputs, and a *compiled objective* expresses the sequence preference through local state transitions and weights, and is able to score the sequence-level preference on a corrupted sentence. Here, our graphical model summarizes the information needed by the remaining computation into latent states, and hence we are able to run dynamic programming (DP) algorithms on the latent states, which avoids explicitly enumerating all the complete sequences. With proper parameterization and model construction, the resulting cost will be polynomial in the problem size, instead of exponential as we previously discussed. At each diffusion step, COFFEE constructs this joint model from the current denoiser predictions, computes the guided probabilities, and samples a clean reconstruction for the diffusion sampler’s existing update rule. The same framework can

support both hard constraints and soft preferences by compiling the objective or a fitted structured surrogate into different forms of graphical models, which can enable us to perform exact reasoning and probability inference. It is a plug-and-play method, leaving pretrained diffusion parameters unchanged and saving time for compute-heavy parameter tuning.

2 METHOD

2.1 PROBLEM FORMULATION

At a fixed diffusion step, we seek a clean reconstruction that is consistent with the denoiser’s predictions and preferred by a sequence-level condition. Let $x_t = (x_t^1, \dots, x_t^L)$ denote the current diffusion state and $x_0 = (x_0^1, \dots, x_0^L)$ a possible clean reconstruction over vocabulary $\mathcal{V}$. For absorbing-mask denoising, $\mathcal{O}_t$ contains all the positions that are not masked, and the unresolved positions form $\mathcal{M}_t = [L] \setminus \mathcal{O}_t$, where $[L] = \{1, \dots, L\}$. In one denoising step, we can start from the predicted token distributions supplied by one forward pass through the frozen denoiser, keeping observed tokens fixed and then defining the diffusion evidence

$$e_{t,i}(u) = \begin{cases} \mathbf{1}[u = x_t^i], & i \in \mathcal{O}_t, \\ p_\theta(x_0^i = u \mid x_t), & i \in \mathcal{M}_t, \end{cases} \quad u \in \mathcal{V}, \quad (2)$$

where $p_\theta(x_0^i = u \mid x_t)$ is the frozen denoiser’s clean-token conditional at position i . To perform reward-guided generation, these token-wise marginals need to be used to construct the joint distribution $q_0(x_0 \mid x_t)$ over clean reconstructions and then impose the preference C through a nonnegative sequence weight W_C . Putting everything together gives us

$$q_C(x_0 \mid x_t) = \frac{q_0(x_0 \mid x_t)W_C(x_0)}{Z_C(x_t)}. \quad (3)$$

Its normalizer sums over completions consistent with the observed tokens and, because $q_0(\cdot \mid x_t)$ is normalized on that support, is the expected condition weight under the neutral joint distribution:

$$Z_C(x_t) = \sum_{x_0^{\mathcal{M}_t}} q_0(x_0 \mid x_t)W_C(x_0) = \mathbb{E}_{x_0 \sim q_0(\cdot \mid x_t)}[W_C(X_0)], \quad x_0^{\mathcal{O}_t} = x_t^{\mathcal{O}_t}. \quad (4)$$

Different values of W_C could have different interpretations. For example, setting $W_C \equiv 1$ leaves q_0 unchanged, while a hard condition uses $W_C(x_0) = \mathbf{1}[x_0 \models C]$ to exclude candidates that violate C , where $x_0 \models C$ means that the complete sequence satisfies C . A soft condition uses $W_C(x_0) = \exp\{\lambda R_C(x_0)\}$, where R_C is a sequence-level reward, where the strength $\lambda \geq 0$ controls the preference for larger scores. Specially, when $W_C(x_0) = q(C \mid x_0)$ is an attribute likelihood, the same expression gives Bayesian conditioning.

The single-token conditional in Eq. 1 is a marginal of the joint distribution in Eq. 3. Our goal is to sample that joint reconstruction rather than draw each token independently from its marginal. As discussed previously, two main challenges are: **(1) coupling token choices** despite the denoiser’s factorized output, and **(2) evaluating the sequence objective** while the tokens that determine its value remain unresolved. These challenges block the way of obtaining the quantities needed in Eq. 3 and 4, resulting in a $\mathcal{O}(|\mathcal{V}|^{|\mathcal{M}_t|})$ level complexity (Fig. 1(a)). COFFEE bypasses the challenges with state-transition graphical models in which a *dependence carrier* retains information linking token choices, and a *compiled objective* tracks their effect on the condition (Fig. 2(A)). In the later sections, we will construct the carrier first, then extend its calculation to the objective.

2.2 CHALLENGE 1: CONSTRUCTING NEUTRAL JOINT TOKEN DISTRIBUTION

Directly sampling the denoiser distributions gives the fully factorized distribution $\prod_i e_{t,i}(x_0^i)$, and the most naive way to construct a joint one is to expand one token at a time while retaining every possible choice, producing a computation tree with $|\mathcal{V}|^{|\mathcal{M}_t|}$ leaves (Fig. 1(a)). Inspired by CoDD (Li et al., 2026), we are compressing the computation tree with states in state transition graphical models (called *carriers*), and the denoiser marginals are used as local evidence absorbed by our carrier to capture the joint dependency. For simplicity, here we are using chain structured Markov models to

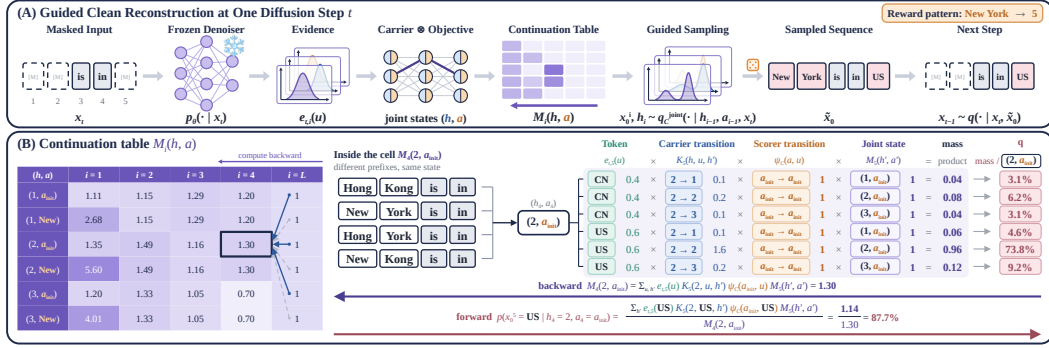


Figure 2: **Joint states support tractable computation for joint sampling.** The upper panel shows how COFFEE transforms diffusion marginals into guided joint distributions. With compiled states, COFFEE runs DP over a continuation table to obtain probability masses, based on which we can get normalized probabilities. The lower panel uses a toy example to dive into the DP process in the table to provide an intuitive understanding of Eq. 15 and 20. In the table, columns index sequence boundaries and rows index joint states (h, a) . Each $M_i(h, a)$ sums the weights of the remaining token-state paths, and generation paths sharing the same boundary state can therefore reuse one entry. The expanded example sums six consecutive states (u, h') to obtain $M_4(2, a_{\text{init}})$. Normalizing US’s probability mass with the previous quantity gives the joint probabilities of the country.

explain how COFFEE works. Let ω be the parameters of our carrier and $h_i \in \mathcal{H}$ be the carrier state after position i , we use nonnegative local factors

$$K_i(h, u, h'; \omega) \geq 0, \quad (5)$$

where $K_i(h, u, h'; \omega)$ couples token u with a state transition. We suppress ω below. With fixed h_0 , we can use these factors and the denoiser evidence jointly to construct the neutral joint distribution

$$q_0(x_0, h_{1:L} | x_t) \propto \prod_{i=1}^L e_{t,i}(x_0^i) K_i(h_{i-1}, x_0^i, h_i), \quad (6)$$

$$q_0(x_0 | x_t) = \sum_{h_{1:L}} q_0(x_0, h_{1:L} | x_t). \quad (7)$$

If we fix the carrier state h_i after position i , a completion from this state specifies both the remaining clean tokens $x_0^{i+1:L}$ and the carrier states $h_{i+1:L}$ connecting them. Its remaining probability weight is the product of the denoiser evidence and carrier factors at positions $i+1$ through L . Due to the Markov property, any two partial paths ending in this state have the same weighted completions. We therefore sum their weights once for each state, defining the total continuation weight

$$B_i(h_i) = \sum_{x_0^{i+1:L}, h_{i+1:L}} \prod_{j=i+1}^L e_{t,j}(x_0^j) K_j(h_{j-1}, x_0^j, h_j). \quad (8)$$

Here, h_i is fixed and the sum ranges over every assignment to the remaining tokens and carrier states. This quantity is the normalizer for the distribution of completions conditioned on h_i and x_t . To compute such quantity, we can start with considering its successor h' , where the current factor $e_{t,i}(u) K_i(h, u, h')$ multiplies the total continuation weight $B_i(h')$ from the successor state,

$$B_{i-1}(h) = \sum_{u \in \mathcal{V}} \sum_{h' \in \mathcal{H}} e_{t,i}(u) K_i(h, u, h') B_i(h'), \quad B_L(h) = 1, \quad (9)$$

which gives us a recurrence relationship between B_i and B_{i-1} and can be used to perform DP. Hence, all B_i with $i = 1..L$ can be computed in polynomial time. Working backward to the fixed start state gives $B_0(h_0) = Z_0(x_t)$, and that is exactly the normalizer of Equation 6. For a reachable state h with $B_{i-1}(h) > 0$, we can partition its succeeding completions by the next token-state pair (u, h') , which has a probability weight $e_{t,i}(u) K_i(h, u, h') B_i(h')$. To obtain the distribution of $(x_0^i = u, h_i = h')$,

we just need to normalize with all the local factors at this state, which gives

$$\begin{aligned} q_0(x_0^i = u, h_i = h' \mid h_{i-1} = h, x_t) &= \frac{e_{t,i}(u)K_i(h, u, h')B_i(h')}{\sum_{v,g} e_{t,i}(v)K_i(h, v, g)B_i(g)} \\ &= \frac{e_{t,i}(u)K_i(h, u, h')B_i(h')}{B_{i-1}(h)}. \end{aligned} \quad (10)$$

With all B_i computed, we can start at h_0 and draw (x_0^i, h_i) pairs from $i = 1$ to L using these conditionals in polynomial time, which is equivalent to sampling from Equation 6 if we discard the sampled carrier states from the sampled results. The carrier is trained without any task-specific preference C and is therefore target-free. During generation, the carrier stays fixed while each diffusion step supplies fresh denoiser evidence. Carrier construction and training details are in Sec. C, while fixed-step sampling details are in Sec. A.

2.3 CHALLENGE 2: SCORING CORRUPTED SEQUENCES WITHOUT NAIVE ENUMERATION

In the previous section we have shown that constructing and then sampling from the joint distribution can be tractable, and we now try to incorporate the sequence level objective into its continuation calculation. To draw samples from Eq. 3, we should make sure that the W_C won't break the computation complexity, and this is what Challenge 2 is about. Using $W_C^{\text{oracle}}(x_0)$ to denote the desired weight, with no assumed structure, our goal is to seek a structured surrogate scorer W_C for the same task signal, whose structure is compatible with the DP computation structure to preserve the complexity. The process of finding such surrogate W_C is called *compilation*, and usually, we just need to find the proper structures we need, and fit the model with the same objectives or distill from a better one. With Prop. 2.1, with the surrogate structure that will be specified later, the approximation error of such compilation can be analysed and controlled. Details are specified in Sec. A.3.

Proposition 2.1 (Objective approximation under compilation). *Fix x_t and a base distribution q_0 with finite support, on which W_C and W_C^{oracle} are finite and strictly positive. Exact compilation preserves the guided law q_C . Let q_C^{oracle} use the same q_0 with the oracle weight. If $|\log W_C(x_0) - \log W_C^{\text{oracle}}(x_0) - c| \leq \epsilon$ throughout this support for some constant c and $\epsilon \geq 0$, then*

$$D_{\text{KL}}(q_C^{\text{oracle}} \| q_C) \leq \epsilon^2/2.$$

To see the required structure, we can start with the simplest scorer class, $W_C^{\text{local}}(x_0) = \prod_i w_C(x_0^i)$, where $w_C(u) \geq 0$. Because each factor concerns only the current token, absorbing it into the carrier transition gives the same backward structure as Equation 9, now incorporating the objective weights,

$$\bar{K}_{C,i}(h, u, h') = K_i(h, u, h')w_C(u), \quad (11)$$

$$B_{i-1}^{\text{local}}(h) = \sum_{u \in \mathcal{V}} \sum_{h' \in \mathcal{H}} e_{t,i}(u) \bar{K}_{C,i}(h, u, h') B_i^{\text{local}}(h'). \quad (12)$$

With $B_L^{\text{local}}(h) = 1$, this computes the guided completion weights and hence the exact conditionals. Each transition only adds one multiplication, which preserves the dense carrier complexity of $O(L|\mathcal{V}|H^2)$, preserving the same time complexity as to sample from the neutral distribution. However, such scorer cannot express preferences for structures formed by multiple tokens, for example, since $W_C^{\text{local}}(\text{AB}) = w_C(\text{A})w_C(\text{B}) = W_C^{\text{local}}(\text{BA})$, it can't even tell orders apart. More generally, an objective may assign scores to occurrences of multiple patterns with different lengths, including repeated and overlapping matches, and they cannot be modeled by such simple class.

Now, our goal is to capture complex patterns while retaining the same DP structure. To do so, we can try to generalize Equations 11 and 12. Notice that the recurrence only requires each objective factor to be computable from the current state and token and the scorer shall have the same transition dynamics as the carrier graphical model, if a finite state a_i can remember the relevant pattern history, we could therefore extend $W_C(x_0)$ to $\prod_{i=1}^L w_C(a_i)$ with a chain-structured update $a_i = \delta_{C,i}(a_{i-1}, x_0^i)$. Such an extension enlarges the state space from h_i to (h_i, a_i) , so the same recurrence can operate on the paired states. With A denoting the number of a_i , the overall time complexity will be $O(LA|\mathcal{V}|H^2)$, preserving the polynomial time complexity.

For a selected pattern set $\mathcal{G}_C$, an Aho-Corasick (AC) automaton (Aho & Corasick, 1975) has all the nice desired properties. Its states $\mathcal{A}$ correspond to shared pattern prefixes, with the empty prefix

as a_{init} . After reading $x_0^{1:i}$, the state a_i records the longest suffix that is also a prefix of a selected pattern. Reading a token extends the current match or falls back to a shorter suffix, giving the update $a_i = \delta_{C,i}(a_{i-1}, x_0^i)$ from $a_0 = a_{\text{init}}$. For simplicity, here we define $\delta_{C,i} = \delta_C$ to be position-independent. Such an automaton can report all selected patterns completed when reading u from a , including overlapping occurrences. For example, `New` starts a partial match and the next token `York` completes `New York` (Figure 1). The transition and output construction is detailed in Sec. A.

The token-only factor $w_C(u)$ in Equation 11 can now be replaced by a nonnegative local weight $\psi_{C,i}(a, u)$. Since both models consume the same token, their joint transition and its weight become

$$(h, a) \xrightarrow{u} (h', \delta_{C,i}(a, u)), \quad \bar{K}_{C,i}(h, a, u, h') = K_i(h, u, h')\psi_{C,i}(a, u). \quad (13)$$

With the modified transition dynamics, we can therefore replace $B_i^{\text{local}}(h)$ in Eq. 12 by $M_i(h, a)$, the total continuation weight from the state pair, and obtain the similar recurrence relationships with nonnegative terminal factor $\eta_C(a)$ (visualization in Fig. 2)

$$M_L(h, a) = \eta_C(a), \quad (14)$$

$$M_{i-1}(h, a) = \sum_{u \in \mathcal{V}} \sum_{h' \in \mathcal{H}} e_{t,i}(u) \bar{K}_{C,i}(h, a, u, h') M_i(h', \delta_{C,i}(a, u)). \quad (15)$$

The backward recurrence gives $M_0(h_0, a_{\text{init}})$, which normalizes the guided joint distribution,

$$q_C^{\text{joint}}(x_0, h_{1:L} \mid x_t) = \frac{\eta_C(a_L)}{M_0(h_0, a_{\text{init}})} \prod_{i=1}^L e_{t,i}(x_0^i) \bar{K}_{C,i}(h_{i-1}, a_{i-1}, x_0^i, h_i). \quad (16)$$

Since the tokens uniquely determine the objective-state path, multiplying its local objective factors gives the sequence-level preference

$$W_C(x_0) = \eta_C(a_L) \prod_{i=1}^L \psi_{C,i}(a_{i-1}, x_0^i), \quad (17)$$

and complex patterns are captured with AC state transitions. With Eq. 16 and 17, we can see that the standalone scorer assigns weights to complete sequences, while the joint inference DP process averages these weights over compatible completions and eventually changes the neutral unguided distribution to a more favored one. In our applications, we just need to train the local factors $\psi(a, u)$ to obtain the compiled objective (Sec. C). The same interface also supports hard conditioning using an appropriate deterministic objective automaton with unit transition weights and $\eta_C(a_L) = \mathbf{1}[a_L \in \mathcal{A}_{\text{accept}}]$ to exclude rejecting paths without requiring a learned scorer.

2.4 COFFEE: GUIDED RECONSTRUCTION

We now connect the continuation weights to the expectation in Eq. 18. As discussed previously, using the same diffusion backbone and carrier, starting from the state (h, a) at the i -th token, $B_i(h)$ is the accumulated probability mass at h state if we run DP without scorer, while $M_i(h, a)$ is the total mass at the joint state (h, a) , with scorer weights added up to the mass. Directly taking their ratio could give us the conditional expectation (details in Eq. 27) and get

$$\frac{M_i(h, a)}{B_i(h)} = \mathbb{E}_{q_0} \left[\eta_C(a_L) \prod_{j=i+1}^L \psi_{C,j}(a_{j-1}, x_0^j) \mid h_i = h, x_t; a_i := a \right]. \quad (18)$$

Based on that, following the same marginalization as in Sec. 2.2, let $a' = \delta_{C,i}(a, u)$. For a current state with $M_{i-1}(h, a) > 0$, the sampling conditional is proportional to

$$\begin{aligned} q_C^{\text{joint}}(x_0^i = u, h_i = h' \mid h_{i-1} = h, a_{i-1} = a, x_t) \\ \propto \underbrace{e_{t,i}(u)}_{\text{base denoiser marginal}} \underbrace{K_i(h, u, h') B_i(h')}_{\text{carrier structure and base continuation}} \underbrace{\psi_{C,i}(a, u)}_{\text{current AC objective weight}} \underbrace{\frac{M_i(h', a')}{B_i(h')}}_{\text{expected remaining objective weight}}, \end{aligned} \quad (19)$$

which holds for fixed (h, a) on base-supported choices. Note that B_i can be canceled and hence doesn't need to be computed during sampling. Using such decomposition, we can further analyze the

New York example: even when New itself has no reward, it can be favored through completions in which New York is formed. Through the carrier’s dependencies, the same preference can also affect positions not directly scored by the objective, and therefore, result in a higher preference in USA.

To draw samples from the joint distribution, COFFEE computes all the M_i values and, following Eq. 10, starts at (h_0, a_{init}) and samples from $i = 1$ to L using

$$q_C^{\text{joint}}(x_0^i = u, h_i = h' \mid h_{i-1} = h, a_{i-1} = a, x_t) = \frac{e_{t,i}(u) \bar{K}_{C,i}(h, a, u, h') M_i(h', a')}{M_{i-1}(h, a)}, \quad (20)$$

where $\bar{K}_{C,i}$ is defined in Eq. 13 and the denominator sums the numerator over all choices by Eq. 15. After drawing (u, h') , set $\tilde{x}_0^i = u$ and update the state to (h', a') . Once a complete reconstruction is obtained, we pass it to the unchanged diffusion update rule with original noise scheduling q_{host}

$$\tilde{x}_0 \sim q_C(\cdot \mid x_t), \quad x_{t-1} \sim q_{\text{host}}(\cdot \mid x_t, \tilde{x}_0), \quad (21)$$

and repeat the algorithm in next diffusion steps to eventually obtain clean samples (Algorithm 3).

Beyond guided sampling, the finite-state compilation and DP structure allow COFFEE to draw on the extensive algorithmic literature on weighted automata (Mohri, 2009), opening a route to richer queries that combine optimization with probabilistic inference. Our Dyck repair task illustrates this potential: we first use a bounded-stack state graph to retain all valid, prefix-preserving paths with the fewest token changes within the declared support. This optimal set then acts as a hard objective: on the retained graph, the same continuation-weight recurrence and sampling rule combine denoiser evidence with carrier dependence. Thus, optimization determines the conditioning event, and our joint inference samples among equally optimal repairs (Sec. 3.1).

Table 1: This table shows the generation results under full diffusion budgets. The warm Dream and blue LLaDA headers denote the two backbones and the black headers denote biological tasks. COFFEE surpasses almost all the baselines on both control and quality metrics over different benchmarks.

Method	Dyck repair				Sudoku				CommonGen				RTP				DeepSTARR				APARENT				K562				Protein			
	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓	Control↑	Quality↓
Base	3.0	13.5	60.4	0.1	38.6	10.1	53.5	5.2	7.5	14.0	20.4	0.3	40.9	14.4	43.3	5.3	-0.4	728.3	2.3	728.3	44.3	728.3	11.0	1.7								
CDD	46.9	14.8	99.3	0.0	46.1	30.4	55.7	17.2	62.5	14.7	90.7	0.0	40.9	18.8	81.7	13.1	3.5	1.2	7.9	682.1	83.7	70.1	10.5	1.7								
CDM	0.2	11.7	100.0	0.0	57.2	33.8	65.6	5.4	7.7	13.8	100.0	0.0	41.5	14.5	54.3	4.9	0.6	429.1	10.1	691.9	72.4	250.9	10.2	1.7								
D-CBG	14.9	14.3	99.8	0.0	39.4	10.4	62.2	5.0	23.1	14.5	98.7	0.0	30.7	32.7	72.4	7.1	-0.5	1799.7	2.2	1492.4	100.0	1.2	11.0	1.7								
DG-TAG	100.0	14.9	100.0	0.0	29.7	9.8	87.9	7.2	100.0	14.9	100.0	0.0	32.9	14.7	66.9	5.4	3.6	2.6	24.3	6.3	97.2	3.4	14.5	1.5								
GILC-DB	6.3	13.5	60.5	0.1	29.6	7.5	42.6	4.8	22.5	14.1	23.2	0.4	41.8	16.1	67.8	4.9	-0.1	448.9	2.5	735.6	48.3	618.3	11.0	1.7								
MDM-VGB	4.5	13.8	93.1	0.0	39.7	10.0	62.4	5.0	25.5	3.0	91.8	0.0	41.0	14.4	72.9	8.9	1.6	56.6	4.3	630.4	84.7	55.5	10.0	1.7								
COFFEE	100.0	7.8	100.0	0.0	100.0	10.2	77.6	6.0	100.0	7.8	100.0	0.0	100.0	20.3	91.6	7.2	5.3	1.1	21.5	16.7	99.8	1.1	28.2	1.4								

3 EXPERIMENTS

3.1 MAIN RESULTS

We evaluate COFFEE with frozen Dream and LLaDA backbones on symbolic and language tasks, D3LM on DNA, and EvoDiff on protein design, covering exact constraints and learned objectives. Dyck repair and Sudoku measure validity alongside edit distance or constraint violations. CommonGen (Lin et al., 2020) and RealToxicityPrompts (RTP) (Gehman et al., 2020) assess lexical coverage and non-toxicity alongside perplexity (PPL). DeepSTARR (de Almeida et al., 2022), APARENT (Bogard et al., 2019), and Malinois (Gosai et al., 2024) use predictor-defined DNA objectives, with native leave-one-out pseudo-perplexity (LOO) and diversity as diagnostics. Protein-1YCR follows EvoDiff’s motif-scaffolding setup (Alamdari et al., 2023) and evaluates structural recovery using OmegaFold (Wu et al., 2022). Table 1 reports full-budget results; Fig. 3 examines whether target attainment is preserved with fewer denoising updates. Details are in Secs. D–E.

Symbolic tasks. On Dyck, COFFEE and DG-TAG both reach full validity, but COFFEE requires fewer edits. Whereas DG-TAG rescues a bounded set of successors, COFFEE’s min-plus pass first retains the minimum-substitution feasible set within the declared support. Denoiser evidence and carrier weights then select among equally optimal repairs, without trading additional edits for a higher generation score. The Sudoku budget sweep tests a different issue: individually feasible digits can still be mutually incompatible. A joint reconstruction supplies a common feasible completion for all

of these choices. CDM also maintains full validity across budgets when its particles operate within exact feasible-completion support, despite its low validity on Dyck. Thus, the symbolic comparison concerns both the construction of the feasible set and how parallel choices are coupled within it.

Language tasks. On CommonGen, COFFEE achieves full coverage across both backbones even under limited budgets in Fig. 3. The compiled terminal condition excludes completions that omit a requested concept, while the objective state tracks concepts already covered, so the remaining completion calculation coordinates the placement of those still missing. Among accepted realizations, word order and surrounding text remain weighted by the denoiser and carrier. On the RTP task, COFFEE preserves good PPL with high non-toxic rates over different budgets and backbones, showing the benefits of joint inference coupled with sequence-level objectives.

Biological sequence design. On biological sequences, COFFEE improves control metrics with low trade-off of sequence quality. On Protein-1YCR, higher structural success is accompanied by lower mean motif RMSD. For DNA, low native LOO can coexist with severe concentration of the outputs. K562 combines high target attainment with few distinct sequences, while DeepSTARR collapses entirely to a single all-T sequence despite favorable activity and LOO scores. The diversity diagnostic exposes the concentration that neither of these two averages measures.

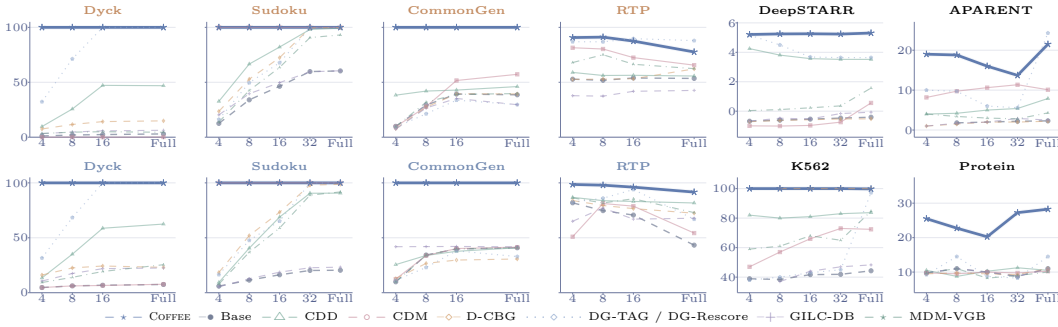


Figure 3: **Control across denoising budgets b (higher is better).** Warm **Dream** and blue **LLaDA** titles distinguish the language backbones; black titles denote biological tasks. Hollow markers indicate archival or qualified settings documented in Sec. F. The results show that COFFEE achieves the highest control effects over almost all the benchmarks, even with only a few diffusion steps.

3.2 MECHANISTIC ANALYSIS

In the HepG2 rollouts, objective weighting changes the evolution of complete clean proposals, yielding more favored proposals at the final displayed update (Fig. 4A). The intervention acts through guided reconstruction. After the host commits tokens, the next reconstruction uses refreshed denoiser evidence and respects those observations. Guidance therefore repeatedly reweights completions compatible with the evolving partial sequence. Eq. 19 combines token-level transition factors with an aggregate weight over the remaining completions. The continuation ratio in Eq. 18 averages downstream objective weight under the neutral model for each current choice. This allows future objective factors to affect the current token conditional. The separate K562 diagnostic exposes this dependence even when downstream token identities are already fixed: their objective contributions still depend on the state reached by the current choice. Clamping their evidence does not make those objective factors common constants that cancel between current candidates. These state-dependent corrections are substantial at a small subset of the queried positions (Fig. 4B-C). Meanwhile, to test completion weighting and joint sampling in complete generations, we run separate controls over CommonGen. Full lowers PPL relative to feasibility-only guidance, while independent guided marginals reduce lexical coverage from 100% to 83.98%, showing why joint sampling matters (Sec. H.4). We have also evaluated the empirical inference speed with the same configuration in Table 1, and shown that without much efforts in designing graphical model specific operators, COFFEE’s inference speed surpasses most of the baselines while obtaining high control as well as generation quality, indicating the benefits of our plug-and-play scheme. Details are in Sec. B.2.

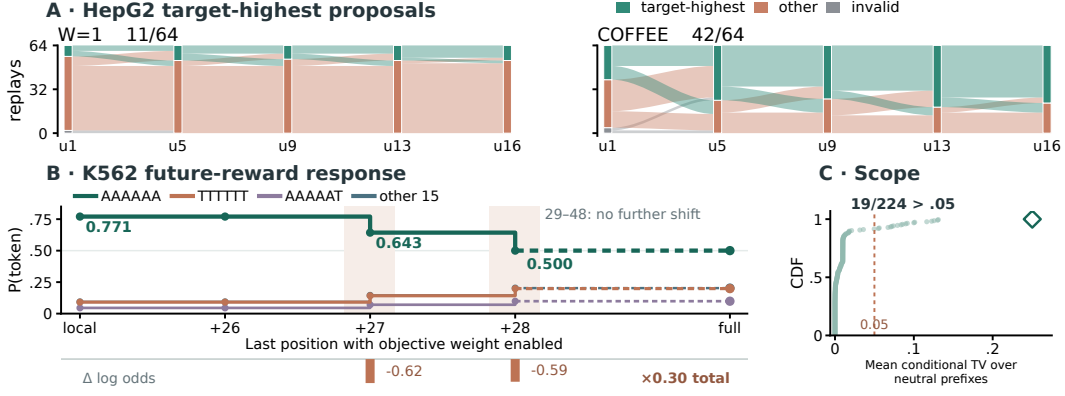


Figure 4: **Proposal trajectories and token-level guidance.** (A) Evaluator-category transitions of complete clean proposals from 64 same-ID HepG2 rollouts per arm, with the objective disabled ($W_C \equiv 1$) or enabled and the identity carrier fixed. Ribbon widths count trajectories, not probability mass. (B) For a fixed K562 query and prefix at position 25, curves show token probabilities as future objective factors are enabled cumulatively; the state graph and all other factors remain fixed. Local omits future weights; Full includes all. Weights at two already observed downstream tokens reduce the probability of AAAAAA. Bars show incremental log odds of AAAAAA against the other candidates. The horizontal axis is objective position, not diffusion time. (C) CDF of Full-Local total variation over 224 masked positions in nine queries, with conditional TV averaged over prefixes under neutral occupancy. The diamond marks the maximum-TV position selected for (B). Protocols are in Sec. H.3.

3.3 DISCUSSION AND RELATED WORK²

The fixed-query analysis in Figure 4 shows how future objective factors can affect a current choice without changing the denoiser evidence, which connects COFFEE to the probabilistic-control view of generation (Levine, 2018), where preferences over complete outcomes inform intermediate decisions. Future discriminators, soft-value decoding, and twisted sequential Monte Carlo obtain such signals through prediction or sampling (Yang & Klein, 2021; Li et al., 2025; Zhao et al., 2024), while GeLaTo, Ctrl-G, and TRACE use tractable completion models (Zhang et al., 2023; 2024; Weng et al., 2025). COFFEE combines this completion-based view with the dependence modeling of CoDD (Li et al., 2026), and within each diffusion step, it aggregates objective contributions over joint reconstructions rather than treating unresolved choices independently to model cross-token dependency.

The compiled representation also supports requirements that are more naturally expressed as inference queries than as a single predictive score, as discussed in Sec. 2.4. Our Dyck repair construction first identifies all minimum-edit valid paths within the declared support, then samples among them using denoiser evidence and carrier weights. This combines optimization with probabilistic conditioning, drawing on weighted-automata algorithms (Mohri, 2009), connecting to neuro-symbolic structured prediction, where neural evidence is combined with explicit constraints (Ahmed et al., 2022; van Krieken et al., 2025). Compatible objective states could similarly combine hard requirements and soft preferences in one reconstruction query. The benefit is therefore not only a change in the scoring function, but access to additional more complex algorithmic computations during generation.

These capabilities depend on finding representations that remain both useful and tractable when combined. Efficient evaluation of the model and scorer separately does not ensure an efficient expectation query (Khosravi et al., 2019), and research in knowledge compilation and circuit operations makes representation size and structural compatibility central to this question (Darwiche & Marquis, 2002; Vergari et al., 2021). Our selected token and phrase features omit interactions outside the scorer class, while richer representations can make the product state too large. Proposition 2.1 bounds objective approximation for a fixed carrier and support, but more theories need to be developed to extend the expressiveness of such representation, and to analyze the diffusion errors alongside the generation process. Circuit restructuring and structured-sparse parameterizations offer related directions for compatible composition and hardware-efficient inference (Zhang et al., 2025b;a).

²A more detailed literature review is in Sec. J.

4 CONCLUSION

We introduced COFFEE, a plug-and-play framework that turns sequence-level objectives into joint reconstruction queries for discrete diffusion. A target-free carrier and compiled objective allow the sampler to coordinate unresolved tokens and account for their possible completions without explicit enumeration. Under the stated representation and support conditions, fixed-step inference is exact for the compiled model and leaves the pretrained generator unchanged. The same interface supports hard conditioning, finite-state soft preferences, and optimization followed by conditional sampling. Experiments show full satisfaction on the evaluated symbolic and lexical tasks and success in reward-guided biological sequence generation. More broadly, the representation of a guidance objective determines not only which sequences it rewards, but also which queries can be answered during generation. Making objectives available to conditioning, marginalization, and optimization enables control over sets of possible completions, rather than requiring those completions to be generated and scored individually, revealing broader potentials for neural-symbolic methods.

AI USE STATEMENT

Generative AI tools were used for literature search and synthesis, feedback on research methodology and experiment design, code implementation and debugging, analysis and interpretation of results, manuscript organization and revision, and preparation of LaTeX tables and figures. They were not used to fabricate or alter experimental measurements, to choose held-out results after observing their outcomes, or to make final scientific decisions. The authors checked AI-assisted citations against the original sources, reviewed and tested AI-assisted code, and reconciled reported values and claims with the frozen experimental artifacts and evaluator outputs. The authors made all final scientific and writing decisions and take responsibility for the complete contents of this preprint.

ETHICS STATEMENT

This computational study recruited no human participants, collected no new personal data, and performed no wet-lab biological experiments. The language evaluation includes potentially harmful text from an established toxicity benchmark, which is used only for computational evaluation. The proposed framework is dual-use because it can steer language or biological sequences toward any objective that admits a compatible representation. Although the evaluated objectives concern non-toxic language and established biological design benchmarks, predictor scores do not establish biological function, safety, or clinical utility. We therefore restrict our claims to the declared evaluators and supports, report failure modes such as mode collapse, and make no claim of experimentally validated biological efficacy.

REPRODUCIBILITY STATEMENT

The appendix guide summarizes the reproducibility path. The method section and Appendices A to C specify the fixed-step law, exactness and complexity boundaries, and construction of the carrier and objectives. Appendices D to E document the data and evaluator contracts, baseline adaptations, development-only selection rules, and frozen configurations. Tab. 1 and Fig. 3 contain the claim-facing results, while Appendix F documents their qualifications. Appendices G to I provide the canonical algorithms, failure semantics, diagnostic protocols, and evidence provenance used to audit the reported claims.

REFERENCES

- Kareem Ahmed, Stefano Teso, Kai-Wei Chang, Guy Van den Broeck, and Antonio Vergari. Semantic probabilistic layers for neuro-symbolic learning. In *Advances in Neural Information Processing Systems*, volume 35, 2022. URL <https://arxiv.org/abs/2206.00426>.
- Alfred V. Aho and Margaret J. Corasick. Efficient string matching: An aid to bibliographic search. *Communications of the ACM*, 18(6):333–340, 1975. doi: 10.1145/360825.360855.

- Sarah Alamdari, Nitya Thakkar, Rianne van den Berg, Neil Tenenholtz, Robert Strome, Alan M. Moses, Alex X. Lu, Nicolò Fusi, Ava P. Amini, and Kevin K. Yang. Protein generation with evolutionary diffusion: Sequence is all you need. *bioRxiv*, 2023. doi: 10.1101/2023.09.11.556673. URL <https://www.biorxiv.org/content/10.1101/2023.09.11.556673>.
- Hyeseon An and Yo-Sub Han. DLM-SWAI: Steering diffusion language models before they unmask, 2026. URL <https://arxiv.org/abs/2605.29626>.
- Jacob Austin, Daniel D. Johnson, Jonathan Ho, Daniel Tarlow, and Rianne van den Berg. Structured denoising diffusion models in discrete state-spaces. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P. S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 17981–17993. Curran Associates, Inc., 2021. URL https://proceedings.neurips.cc/paper_files/paper/2021/file/958c530554f78bcd8e97125b70e6973d-Paper.pdf.
- Animesh Awasthi, Raphael Bednarsky, Moritz Schaefer, and Christoph Bock. Conditional monte carlo tree diffusion for designing cell-type-specific and biologically faithful regulatory DNA, 2026. URL <https://arxiv.org/abs/2604.20488>.
- Yoav Benjamini and Yosef Hochberg. Controlling the false discovery rate: A practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society: Series B*, 57(1):289–300, 1995. doi: 10.1111/j.2517-6161.1995.tb02031.x. URL <https://doi.org/10.1111/j.2517-6161.1995.tb02031.x>.
- Nicholas Bogard, Johannes Linder, Alexander B. Rosenberg, and Georg Seelig. A deep neural network for predicting and engineering alternative polyadenylation. *Cell*, 178(1):91–106.e23, 2019. doi: 10.1016/j.cell.2019.04.046. URL <https://doi.org/10.1016/j.cell.2019.04.046>.
- Dake Bu, Wei Huang, Andi Han, Si Wu, Hau-San Wong, Qingfu Zhang, Taiji Suzuki, and Atsushi Nitanda. DPRM: A plug-in doob h transform-induced token-ordering module for discrete diffusion models, 2026. URL <https://arxiv.org/abs/2604.24357>.
- Michael Cardei, Jacob K Christopher, Bhavya Kailkhura, Tom Hartvigsen, and Ferdinando Fioretto. Constrained discrete diffusion. In *Advances in Neural Information Processing Systems*, volume 38, Main Conference, pp. 12383–12416. Curran Associates, Inc., 2025. doi: 10.52202/085713-0415.
- Meihua Dang and Stefano Ermon. Constrained decoding for diffusion language models via efficient inference over finite automata, 2026. URL <https://arxiv.org/abs/2607.07026>.
- Adnan Darwiche and Pierre Marquis. A knowledge compilation map. *Journal of Artificial Intelligence Research*, 17:229–264, 2002. doi: 10.1613/jair.989. URL <https://arxiv.org/abs/1106.1819>.
- Bernardo P. de Almeida, Franziska Reiter, Michaela Pagani, and Alexander Stark. DeepSTARR predicts enhancer activity from DNA sequence and enables the de novo design of synthetic enhancers. *Nature Genetics*, 54(5):613–624, 2022. doi: 10.1038/s41588-022-01048-5. URL <https://doi.org/10.1038/s41588-022-01048-5>.
- Hongkun Dou, Zike Chen, Fengji Li, Hongjue Li, and Yue Deng. Plug-and-play guidance for discrete diffusion models via gradient-informed logit correction. In *Proceedings of the 43rd International Conference on Machine Learning*, 2026. URL <https://arxiv.org/abs/2606.06303>.
- Samuel Gehman, Suchin Gururangan, Maarten Sap, Yejin Choi, and Noah A. Smith. RealToxicityPrompts: Evaluating neural toxic degeneration in language models. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 3356–3369. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.findings-emnlp.301. URL <https://aclanthology.org/2020.findings-emnlp.301/>.
- Sager J. Gosai, Rodrigo I. Castro, Natalia Fuentes, John C. Butts, Kousuke Mouri, Michael Alasoadura, Susan Kales, Thanh Thanh L. Nguyen, Ramil R. Noche, Arya S. Rao, Mary T. Joy, Pardis C. Sabeti, Steven K. Reilly, and Ryan Tewhey. Machine-guided design of cell-type-targeting cis-regulatory elements. *Nature*, 634(8036):1211–1220, 2024. doi: 10.1038/s41586-024-08070-z. URL <https://doi.org/10.1038/s41586-024-08070-z>.

- Nate Gruver, Samuel Stanton, Nathan C. Frey, Tim G. J. Rudner, Isidro Hotzel, Julien Lafrance-Vanasse, Arvind Rajpal, Kyunghyun Cho, and Andrew Gordon Wilson. Protein design with guided discrete diffusion. In *Advances in Neural Information Processing Systems*, volume 36, pp. 12489–12517, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/29591f355702c3f4436991335784b503-Abstract-Conference.html.
- Laura Hanu and Unitary team. Detoxify, 2020. URL <https://github.com/unitaryai/detoxify>.
- Kijung Jeon, Thuy-Duong Vuong, and Molei Tao. VGB for masked diffusion model: Efficient test-time scaling for reward satisfaction and sample editing, 2026. URL <https://arxiv.org/abs/2606.28301>.
- Pasha Khosravi, YooJung Choi, Yitao Liang, Antonio Vergari, and Guy Van den Broeck. On tractable computation of expected predictions. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL <https://arxiv.org/abs/1910.02182>.
- Jaeyeon Kim, Seunggeun Kim, Taekyun Lee, David Z. Pan, Hyeji Kim, Sham Kakade, and Sitan Chen. Fine-tuning masked diffusion for provable self-correction. *arXiv preprint arXiv:2510.01384*, 2025. Jaeyeon Kim and Seunggeun Kim contributed equally; Taekyun Lee is also a co-first author.
- Jaihoon Kim, Taehoon Yoon, Prin Phunyahphibarn, Seungjun Kim, Morteza Mardani, and Minhyuk Sung. Contrastive distribution matching for amortized sequential monte carlo in discrete diffusion. *arXiv preprint arXiv:2605.23346*, 2026.
- Zitai Kong, Yifan Dong, Yixuan Wu, Zhaokang Liang, Jian Wu, and Hongxia Xu. MP2D: Constrained monte carlo tree-guided diffusion for multi-objective protein sequence design. In Diego Calvanese (ed.), *Proceedings of the Thirty-Fifth International Joint Conference on Artificial Intelligence, IJCAI-26*, pp. 5540–5548. International Joint Conferences on Artificial Intelligence Organization, 8 2026. doi: 10.24963/ijcai.2026/617. URL <https://doi.org/10.24963/ijcai.2026/617>. Main Track.
- Sergey Levine. Reinforcement learning and control as probabilistic inference: Tutorial and review. *arXiv preprint arXiv:1805.00909*, 2018. URL <https://arxiv.org/abs/1805.00909>.
- Ian Li, Zilei Shao, Benjie Wang, Rose Yu, Guy Van den Broeck, and Anji Liu. Breaking the factorization barrier in diffusion language models. In *Proceedings of the 43rd International Conference on Machine Learning*, 2026. URL <https://arxiv.org/abs/2603.00045>.
- Xiner Li, Yulai Zhao, Chenyu Wang, Gabriele Scalia, Gokcen Eraslan, Surag Nair, Tommaso Biancalani, Shuiwang Ji, Aviv Regev, Sergey Levine, and Masatoshi Uehara. Derivative-free guidance in continuous and discrete diffusion models with soft value-based decoding. In *Advances in Neural Information Processing Systems*, volume 38, 2025. doi: 10.52202/085713-3194. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/899af0d66d8850318a20781484416152-Abstract-Conference.html.
- Bill Yuchen Lin, Wangchunshu Zhou, Ming Shen, Pei Zhou, Chandra Bhagavatula, Yejin Choi, and Xiang Ren. CommonGen: A constrained text generation challenge for generative commonsense reasoning. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pp. 1823–1840. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.findings-emnlp.165. URL <https://aclanthology.org/2020.findings-emnlp.165/>.
- Anji Liu, Oliver Broadrick, Mathias Niepert, and Guy Van den Broeck. Discrete copula diffusion. In Y. Yue, A. Garg, N. Peng, F. Sha, and R. Yu (eds.), *International Conference on Learning Representations*, volume 2025, pp. 88953–88979, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/file/dd1fef536655685898a6602bfbf16857-Paper-Conference.pdf.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models. In *International Conference on Learning Representations*, 2017. URL <https://openreview.net/forum?id=Byj72udxe>.

- Mehryar Mohri. Weighted automata algorithms. In Manfred Droste, Werner Kuich, and Heiko Vogler (eds.), *Handbook of Weighted Automata*, pp. 213–254. Springer, 2009. doi: 10.1007/978-3-642-01492-5_6. URL https://link.springer.com/chapter/10.1007/978-3-642-01492-5_6.
- Shen Nie, Fengqi Zhu, Zebin You, Xiaolu Zhang, Jingyang Ou, Jun Hu, Jun Zhou, Yankai Lin, Ji-Rong Wen, and Chongxuan Li. Large language diffusion models. In *Advances in Neural Information Processing Systems*, volume 38, 2025. doi: 10.52202/085713-1689. URL <https://arxiv.org/abs/2502.09992>.
- Hunter Nisonoff, Junhao Xiong, Stephan Allenspach, and Jennifer Listgarten. Unlocking guidance for discrete state-space diffusion and flow models. In *International Conference on Learning Representations*, volume 2025, pp. 36052–36106, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/file/597254dc45be8c166d3ccf0ba2d56325-Paper-Conference.pdf.
- Prin Phunyahibarn and Minhyuk Sung. Reward-guided discrete diffusion via clean-sample markov chain for molecule and biological sequence design. In *Proceedings of the 2nd DeLTa Workshop at ICLR*, 2026. URL <https://arxiv.org/abs/2602.09424>.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. Technical report, OpenAI, 2019.
- Yair Schiff, Subham Sahoo, Hao Phung, Guanghan Wang, Sam Boshar, Hugo Dallar-torre, Bernardo Almeida, Alexander Rush, Thomas Pierrot, and Volodymyr Kuleshov. Simple guidance mechanisms for discrete diffusion models. In *International Conference on Learning Representations*, volume 2025, pp. 43776–43821, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/file/6cc31b44d88dce8380d36e81485cd07f-Paper-Conference.pdf.
- Tarun Suresh, Debangshu Banerjee, Shubham Ugare, Sasa Misailovic, and Gagandeep Singh. DINGO: Constrained inference for diffusion LLMs. In *Advances in Neural Information Processing Systems*, volume 38, 2025. doi: 10.52202/085713-5362. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/eb17a2030d1bd4a1bd29531bcd626705-Abstract-Conference.html.
- Charles Sutton and Andrew McCallum. An introduction to conditional random fields. *Foundations and Trends in Machine Learning*, 4(4):267–373, 2012. doi: 10.1561/22000000013. URL <https://doi.org/10.1561/22000000013>.
- Emile van Krieken, Pasquale Minervini, Edoardo Maria Ponti, and Antonio Vergari. Neurosymbolic diffusion models. In *Advances in Neural Information Processing Systems*, volume 38, pp. 150640–150682, 2025. doi: 10.52202/085713-4535. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/c60bd92a01804b7df0540ed7ca2f7c05-Abstract-Conference.html.
- Antonio Vergari, YooJung Choi, Anji Liu, Stefano Teso, and Guy Van den Broeck. A compositional atlas of tractable circuit operations for probabilistic inference. In *Advances in Neural Information Processing Systems*, volume 34, 2021. URL <https://starai.cs.ucla.edu/papers/VergariNeurIPS21.pdf>.
- Weixin Wang, Yu Yang, Wei Deng, and Pan Xu. Inference-time alignment of diffusion models via trust-region iterative twisted sequential monte carlo, 2026. URL <https://arxiv.org/abs/2605.25123>.
- Gwen Yidou Weng, Benjie Wang, and Guy Van den Broeck. TRACE back from the future: A probabilistic reasoning approach to controllable language generation. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, 2025. URL <https://arxiv.org/abs/2504.18535>.
- Ruidong Wu, Fan Ding, Rui Wang, Rui Shen, Xiwen Zhang, Shitong Luo, Chenpeng Su, Zuofan Wu, Qi Xie, Bonnie Berger, Jianzhu Ma, and Jian Peng. High-resolution de novo structure prediction from primary sequence. *bioRxiv*, 2022. doi: 10.1101/2022.07.21.500999. URL <https://www.biorxiv.org/content/10.1101/2022.07.21.500999>.

- Kevin Yang and Dan Klein. FUDGE: Controlled text generation with future discriminators. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 3511–3535. Association for Computational Linguistics, 2021. doi: 10.18653/v1/2021.naacl-main.276. URL <https://aclanthology.org/2021.naacl-main.276/>.
- Zhao Yang, Hengchang Liu, Chuan Cao, and Bing Su. D3LM: A discrete DNA diffusion language model for bidirectional DNA understanding and generation, 2026. URL <https://arxiv.org/abs/2603.01780>.
- Jiacheng Ye, Zhihui Xie, Lin Zheng, Jiahui Gao, Zirui Wu, Xin Jiang, Zhenguo Li, and Lingpeng Kong. Dream 7b: Diffusion large language models, 2025. URL <https://arxiv.org/abs/2508.15487>.
- Amman Yusuf, Zhejun Jiang, and Mijung Park. The safety-aware denoiser for text diffusion models, 2026. URL <https://arxiv.org/abs/2605.08116>.
- Honghua Zhang, Meihua Dang, Nanyun Peng, and Guy Van den Broeck. Tractable control for autoregressive language generation. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, 2023. URL <https://arxiv.org/abs/2304.07438>.
- Honghua Zhang, Po-Nien Kung, Masahiro Yoshida, Guy Van den Broeck, and Nanyun Peng. Adaptable logical control for large language models. In *Advances in Neural Information Processing Systems*, volume 37, 2024. URL <https://arxiv.org/abs/2406.13892>.
- Honghua Zhang, Meihua Dang, Benjie Wang, Stefano Ermon, Nanyun Peng, and Guy Van den Broeck. Scaling probabilistic circuits via Monarch matrices. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 74804–74818. PMLR, 2025a. URL <https://proceedings.mlr.press/v267/zhang25q.html>.
- Honghua Zhang, Benjie Wang, Marcelo Arenas, and Guy Van den Broeck. Restructuring tractable probabilistic circuits. In *Proceedings of the 28th International Conference on Artificial Intelligence and Statistics*, volume 258 of *Proceedings of Machine Learning Research*, pp. 2566–2574. PMLR, 2025b. URL <https://proceedings.mlr.press/v258/zhang25f.html>.
- Stephen Zhao, Rob Brekelmans, Alireza Makhzani, and Roger Baker Grosse. Probabilistic inference in language models via twisted sequential Monte Carlo. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 60704–60748. PMLR, 2024. URL <https://proceedings.mlr.press/v235/zhao24c.html>.

GUIDE TO THE APPENDIX

This appendix follows the objects and claims introduced in the main paper. Secs. A to C give the formal derivations, computational boundary, and construction of the carrier and objectives. Secs. D to F specify the evaluation contracts, comparison rules, frozen configurations, and qualifications needed for the main results. The final three sections provide canonical algorithms, process diagnostics, and evidence provenance. Current benchmark endpoints are kept separate from DEV or TRAIN-derived diagnostics and from historical cohorts.

Reader conventions. TRAIN, DEV, and TEST denote fitting, configuration selection, and final evaluation roles. A *frozen configuration* has its model, objective, hyperparameters, prompt or structured input, and evaluator fixed before final evaluation. The *host* is the unchanged pretrained diffusion backbone and its original update rule. A *port* is our implementation of a published algorithmic idea on that host and does not imply author-code identity. NFE denotes the realized number of denoiser row-forward evaluations. Full denotes the task-native full budget used in Tab. 1; it does not imply equal total compute across methods.

Section	Contents	Page
A	Additional method details and guarantees	15
B	Implementation boundary and computational cost	20
C	Carrier and objective construction	22
D	Experimental setup and evaluation	25
E	Baselines and hyperparameter selection	27
F	Main-claim support and result qualifications	29
G	Canonical algorithms and failure semantics	31
H	Guidance dynamics and diagnostic experiments	32
I	Reproducibility and evidence provenance	34

For a direct route from the main paper, the fixed-step law and exactness lead to Secs. A to B; the carrier and fitted objectives lead to Sec. C; the benchmark table and budget curves lead to Secs. D to F; and Fig. 4 leads to Sec. H.

A ADDITIONAL METHOD DETAILS AND GUARANTEES

A.1 FIXED-STEP INTERFACE AND HMM REALIZATION

This appendix states precisely what is normalized, what is compiled, and where approximations enter. Fix one denoising update and one block. Let $x = (x_1, \dots, x_L)$ be the block tokens and let $\mathcal{S} = \prod_i \mathcal{S}_i$ be the candidate support fixed before the dynamic program. At the interface level, $e_{t,i}$ is frozen denoiser evidence, K_i is a nonnegative target-free carrier factor, and $(\psi_{C,i}, \eta_C)$ is the compiled objective. These are the same objects as in Sec. 2.4; the appendix does not redefine the method as an HMM.

The target-free hidden Markov model (HMM) used by the structured-carrier implementation is one realization of K_i . It has latent path $h = (h_1, \dots, h_L)$, initial distribution π , transition matrix A , and token emissions E . With frozen denoiser log evidence $\ell_i(v)$, evidence temperature τ_e , and carrier-emission temperature τ_m , the retained base score is

$$\begin{aligned} \log q_0^{\mathcal{S}}(x, h) \doteq & \sum_{i=1}^L \frac{\ell_i(x_i)}{\tau_e} + \log \pi(h_1) + \sum_{i=2}^L \log A(h_i \mid h_{i-1}) \\ & + \sum_{i=1}^L \frac{\log E(x_i \mid h_i)}{\tau_m}, \quad x \in \mathcal{S}, \end{aligned} \quad (22)$$

where $\doteq$ denotes equality up to a path-independent normalizer. For a masked position, $\ell_i(v) = \log p_\theta(x_0^i = v \mid x_t)$; the effective unary factor is proportional to $\exp\{\ell_i(v)/\tau_e\}$, reducing to Eq. 2 at $\tau_e = 1$. Observed tokens remain clamped. For a fixed prefix, π is replaced by the predictive distribution for the first block state: filter the prefix to obtain its final-state posterior, then apply one carrier transition before scoring the first block emission. The neutral one-state identity carrier is represented by a unit K_i factor.

Let a_i be the reward state and $s_i = (h_i, a_i)$ the product state. For $i > 1$, an edge $e_i = (s_{i-1}, v, s_i)$ has log score

$$g_i(e_i) = \frac{\ell_i(v)}{\tau_e} + \log A(h_i \mid h_{i-1}) + \frac{\log E(v \mid h_i)}{\tau_m} + \lambda r_i(a_{i-1}, v), \quad (23)$$

subject to $v \in \mathcal{S}_i$ and $a_i = \delta(a_{i-1}, v)$. The first edge uses this predictive carrier distribution (or π without a prefix) in place of a transition from the dummy state h_0 .

Let $\mathcal{G} = (\mathcal{N}, \mathcal{E})$ be the resulting layered acyclic graph. A vertex at level i is a retained product state $s_i = (h_i, a_i)$; an edge $e_i = (s_{i-1}, x_i, s_i)$ is present only when x_i is in the declared token support, the carrier transition is allowed, and $a_i = \delta(a_{i-1}, x_i)$. Define

$$W(\xi) = \exp \left\{ \sum_{i=1}^L g_i(e_i) + \log \eta_C(a_L) \right\} \quad (24)$$

for a complete path $\xi = (e_1, \dots, e_L)$, using $\log 0 = -\infty$. The terminal factor η_C is the one in Eq. 17; it is not multiplied by the soft reward strength. The path partition is $Z_G = \sum_{\xi \in \mathcal{G}} W(\xi)$. The method samples $W(\xi)/Z_G$ when $0 < Z_G < \infty$ and the ancestral temperature is one. The special cases in Tab. 2 share this construction.

Table 2: Special cases of the same graph construction. The identity carrier is an ablation of the full method; the identity reward controller has one state.

Instance	Product state	Reward factor
Diffusion-only	identity	1
Carrier-only	h_i	1
Learned guidance	(h_i, a_i)	$\exp\{\lambda R_\phi(x)\}$
Hard constraint	(h_i, a_i)	$\mathbf{1}[a_L \in \mathcal{A}_{\text{accept}}]$
Strict repair	$(h_i, \text{bounded stack}_i)$	$\mathbf{1}[x \in \mathcal{L}, d_H(x, y) = d^*(y)]$

A.2 EXACT COMPILATION OF COUNT ENERGIES

We suppress the fixed condition index C here and allow position-dependent token coefficients u_i . Shared token coefficients are the special case $u_i(u) = u_u$.

Let $\mathcal{P} = \{p_j\}_{j=1}^J$ be the selected token patterns and let the Aho–Corasick output set $\mathcal{O}(a_{i-1}, x_i)$ contain every pattern that ends after consuming x_i (Aho & Corasick, 1975). The compiler assigns

$$r_i(a_{i-1}, x_i) = u_i(x_i) + \sum_{j: p_j \in \mathcal{O}(a_{i-1}, x_i)} w_j. \quad (25)$$

Lemma A.1 (Count-energy compilation). *For every token sequence x , including sequences with overlapping pattern occurrences,*

$$\sum_{i=1}^L r_i(a_{i-1}, x_i) = \sum_{i=1}^L u_i(x_i) + \sum_{j=1}^J w_j c_j(x) = R_\phi(x) - b.$$

Proof. The token term contributes once at every position. Aho–Corasick reports a pattern exactly at each position at which one occurrence ends; output links retain simultaneous suffix matches, so overlapping and nested occurrences are not discarded. Summing the reported w_j terms therefore contributes w_j exactly $c_j(x)$ times. The fitted intercept is absent because it is constant across all paths in the same normalized kernel. $\square$

Automatic weighted-automaton construction. The compiler inserts every selected token pattern into a trie. Breadth-first failure links map a missing transition to the longest suffix that is also a trie prefix. The reward stored at a state is its own terminal weight plus the reward at its failure state. Consequently one transition emits the sum of *all* selected patterns ending at that position, including nested and overlapping matches. For the candidate tokens admitted by a denoising block, the compiler caches $\delta(a, v)$ and the phrase-match reward for every reachable state a and token v ; the position-dependent token term is added when scoring the edge at position i .

Record-conditioned lexical DFA. CommonGen uses the same transition interface but no learned weights. For each record, the adapter enumerates the accepted standalone forms of every concept: the base form, its regular plural (*s*, *es*, or *ies*), and its possessive form. These finite token strings are compiled into a lexical prefix machine. A DFA state stores the active form prefixes together with a bit mask of concepts already completed at word boundaries; a forbidden concept, when present, enters a reject sink. The terminal score is zero only when every required bit is set and no reject state has been reached, and is $-\infty$ otherwise. We enumerate only states reachable under the declared per-position token support. If that support cannot reach acceptance, the adapter fails closed rather than softening the constraint.

A.3 EXACT COMPILATION AND ORACLE APPROXIMATION

Exact compilation means that the local transition and terminal weights multiply to a positive sequence-independent constant times the fitted sequence weight. For the count score, Lem. A.1 gives

$$\prod_{i=1}^L \exp\{\lambda r_{C,i}(a_{i-1}, x_0^i)\} = \exp\{-\lambda b_C\} \exp\{\lambda R_{\phi,C}(x_0)\}.$$

The first factor cancels from the guided distribution. For a hard recognizer, the compiled weight equals the acceptance indicator, including its zero set. Thus compilation implements the chosen objective without changing its guided law. It does not guarantee that a fitted objective matches an unrestricted oracle.

Proof of Prop. 2.1. All distributions below use the same fixed x_t , base distribution, and support. Let $d(x_0) = \log W_C(x_0) - \log W_C^{\text{oracle}}(x_0)$ and define

$$A(s) = \log \mathbb{E}_{q_C^{\text{oracle}}}[e^{sd(x_0)}], \quad q_s(x_0) = q_C^{\text{oracle}}(x_0) e^{sd(x_0) - A(s)}.$$

Then $q_1 = q_C$, $A'(s) = \mathbb{E}_{q_s}[d]$, and $A''(s) = \text{Var}_{q_s}(d)$. Since $|d - c| \leq \epsilon$, $A''(s) \leq \mathbb{E}_{q_s}[(d - c)^2] \leq \epsilon^2$. Consequently,

$$D_{\text{KL}}(q_C^{\text{oracle}} \| q_C) = A(1) - A(0) - A'(0) = \int_0^1 (1 - s) A''(s) ds \leq \epsilon^2/2.$$

Replacing the integrand by $sA''(s)$ gives the same bound in the reverse direction. Exact compilation leaves q_1 unchanged by the constant-cancellation argument above. $\square$

Function-class gap and actual fitting error. On this finite support, let $\mathcal{F}_m$ be a class of log-weights that admit exact compilation under representation budget m . Define

$$\delta_m = \inf_{f \in \mathcal{F}_m, c \in \mathbb{R}} \|f - \log W_C^{\text{oracle}} - c\|_{\infty}.$$

For the actual fitted log-weight $\log W_{C,m} \in \mathcal{F}_m$, let $\epsilon_m = \inf_c \|\log W_{C,m} - \log W_C^{\text{oracle}} - c\|_{\infty}$ and $\rho_m = \epsilon_m - \delta_m \geq 0$. The proposition applies with $\epsilon_m = \delta_m + \rho_m$, not with the class infimum alone. Nested classes make δ_m nonincreasing, but do not imply that it tends to zero. If both δ_m and ρ_m tend to zero, the fixed-step KL gap does too. Without attainment, $\delta_m = 0$ means membership in the closure modulo constants, not necessarily an exact finite representation.

These are conditional approximation statements, not convergence guarantees for the current training procedure. Prediction loss on training data does not establish uniform log-weight error on generated sequences. For positive Boltzmann weights, the comparison is between log-weights, so guidance strength is already included. If weights can be zero, first require matching feasible support and restrict the comparison to its positive part. The result does not cover support mismatch, arbitrary pruning, non-unit sampling temperature, or the full multi-step diffusion distribution.

The three normalizers. The main text uses three related but non-interchangeable quantities. On the same fixed support,

$$Z_0(x_t) = B_0(h_0), \quad Z_C(x_t) = \mathbb{E}_{q_0}[W_C] = \frac{M_0(h_0, a_{\text{init}})}{B_0(h_0)}. \quad (26)$$

Thus B_0 normalizes the neutral carrier-evidence joint, M_0 is the unnormalized total weight after adding the compiled objective, and Z_C is the expected objective weight under the already normalized q_0 . When a scorer intercept is omitted during compilation, the normalized guided law is unchanged, but M_0 is multiplied by the corresponding path-independent constant; all partition values in this appendix use the intercept-free compiled-weight convention.

Meaning of the backward-weight ratio. For a base-reachable state with $B_i(h) > 0$, start the objective path at $a_i = a$. The notation $a_i := a$ initializes the objective automaton for the continuation; it does not condition the neutral law on a past objective state. Expanding the expectation in Eq. 18 gives

$$\begin{aligned} & \mathbb{E}_{q_0} \left[\eta_C(a_L) \prod_{j=i+1}^L \psi_{C,j}(a_{j-1}, x_0^j) \mid h_i = h, x_t; a_i := a \right] \\ &= \sum_{x_0^{i+1:L}, h_{i+1:L}} \frac{\prod_{j=i+1}^L e_{t,j}(x_0^j) K_j(h_{j-1}, x_0^j, h_j)}{B_i(h)} \eta_C(a_L) \prod_{j=i+1}^L \psi_{C,j}(a_{j-1}, x_0^j) \\ &= \frac{M_i(h, a)}{B_i(h)}. \end{aligned} \quad (27)$$

Eq. 27 follows by dividing the remaining product weights by their carrier-only normalizer $B_i(h)$ and taking the expectation of the remaining objective factors, starting at $a_i = a$. Thus M_i itself is generally not a probability. For indicator constraints, M_i/B_i is the continuation acceptance probability, with previous violations recorded in the objective state. For soft objectives it is an expected weight and may exceed one. This identity uses the unpruned product construction, or the same fixed per-position token support in numerator and denominator. If product-state pruning makes the remaining support depend on a , the matching carrier-only normalizer must instead be computed on that same retained graph and generally depends on both h and a .

Guided sampling conditional. Fix (h, a) with $M_{i-1}(h, a) > 0$, and let $a' = \delta_{C,i}(a, u)$. Marginalizing the remaining assignments gives

$$\begin{aligned} & q_C^{\text{joint}}(x_0^i = u, h_i = h' \mid h_{i-1} = h, a_{i-1} = a, x_t) \\ &= \sum_{x_0^{i+1:L}, h_{i+1:L}} q_C^{\text{joint}}(x_0^i = u, h_i = h', x_0^{i+1:L}, h_{i+1:L} \mid h_{i-1} = h, a_{i-1} = a, x_t) \\ &= \frac{e_{t,i}(u) K_i(h, u, h') \psi_{C,i}(a, u) M_i(h', a')}{M_{i-1}(h, a)} \\ &= q_0(x_0^i = u, h_i = h' \mid h_{i-1} = h, x_t) \psi_{C,i}(a, u) \frac{M_i(h', a')}{B_i(h')} \frac{B_{i-1}(h)}{M_{i-1}(h, a)}. \end{aligned} \quad (28)$$

The last equality uses Eq. 10 on base-supported choices with $B_i(h') > 0$, with the same continuation support in both messages. Since $B_{i-1}(h)/M_{i-1}(h, a)$ is constant across (u, h') , this gives Eq. 19. The direct fraction in the second equality computes the conditional without a separate carrier-only backward pass.

A.4 OBJECTIVE-AGNOSTIC CACHE REUSE

For corpus rows $\mathcal{D}$ and mining configuration η , the candidate miner is a deterministic map $\mathcal{M}(\mathcal{D}, \eta)$ based only on tokenized document frequency. Its count matrix is likewise a deterministic map of the rows and candidate grammar. Therefore, changing a target label while holding $\mathcal{D}$ and η fixed does not require re-mining or recounting. Target changes rerun only score tests, selection, and fitting. This separation is an algorithmic contract, not merely a cache optimization.

A.5 STRICT MINIMUM-EDIT REPAIR

Let y be an observed sequence, F a set of positions that must remain fixed, $\mathcal{L}$ the valid language, and $\mathcal{S}$ the declared token support. We first compute

$$d^*(y) = \min_{x \in \mathcal{S} \cap \mathcal{L}, x_F = y_F} d_H(x, y). \quad (29)$$

The repair kernel is then

$$q_{\text{repair}}(x, h \mid y) \propto q_0^{\mathcal{S}}(x, h) \mathbf{1}[x \in \mathcal{L}, x_F = y_F] \mathbf{1}[d_H(x, y) = d^*(y)]. \quad (30)$$

A forward min-plus pass gives the cheapest prefix cost for every bounded-stack state, and a backward min-plus pass gives its cheapest valid completion. An edge is retained exactly when its prefix cost, local substitution cost, and suffix cost sum to $d^*(y)$. Ordinary sum-product messages then weight this optimal subgraph by frozen denoiser evidence and the target-free carrier; Alg. 4 samples from Eq. (30).

The present contract does not cover insertions, deletions, an unbounded pushdown language, or dynamic multi-step repair evidence. The development-only repair diagnostic is reported with the other diagnostics in App. H.2.

A.6 EXACT BACKWARD INFERENCE AND ANCESTRAL REPLAY

Proposition A.2 (Exactness of the compiled fixed-step query). *Fix x_t , the evidence, and finite carrier and objective state spaces. Assume all factors in Eq. 16 are finite and nonnegative, with $0 < Z = M_0(h_0, a_{\text{init}}) < \infty$. In exact arithmetic, Eq. 15 and the unit-temperature conditionals in Eq. 19 sample the normalized compiled joint.*

Proof. The terminal message is the remaining weight $\eta_C(a_L)$. Backward induction shows that each preceding message sums all compatible remaining factor products. Thus the denominator of Eq. 19 is the sum of its numerators. Only positive-mass successors can be sampled, so each subsequent conditional is defined. For a complete sampled path,

$$\begin{aligned} & \prod_{i=1}^L \frac{e_{t,i}(x_0^i) K_i(h_{i-1}, x_0^i, h_i) \psi_{C,i}(a_{i-1}, x_0^i) M_i(h_i, a_i)}{M_{i-1}(h_{i-1}, a_{i-1})} \\ &= \frac{\eta_C(a_L)}{Z} \prod_{i=1}^L e_{t,i}(x_0^i) K_i(h_{i-1}, x_0^i, h_i) \psi_{C,i}(a_{i-1}, x_0^i). \end{aligned}$$

All intermediate messages cancel. Summing out the carrier path recovers Eq. 3. The argument also applies to a fixed restricted graph when the same edges and factors are used for inference and sampling. $\square$

Log-domain form on a retained graph. For a state s_i define the suffix mass

$$\beta_i(s_i) = \sum_{\xi_{i+1:L} | s_i} \exp \left\{ \sum_{j=i+1}^L g_j(e_j) + \log \eta_C(a_L) \right\}. \quad (31)$$

At the terminal level, $\beta_L(h_L, a_L) = \exp\{\log \eta_C(a_L)\}$. The ordinary sum-product recursion is

$$\beta_{i-1}(s_{i-1}) = \sum_{e_i: s_{i-1} \rightarrow s_i} \exp\{g_i(e_i)\} \beta_i(s_i). \quad (32)$$

Eq. (15) is the same probability-space recursion with the denoiser, carrier, and objective factors written explicitly.

Corollary A.3 (Exact replay on a retained graph). *Under Prop. A.2, fix the candidate tokens and the retained product-state graph. Sampling each edge according to*

$$p(e_i | s_{i-1}) = \frac{\exp\{g_i(e_i)\} \beta_i(s_i)}{\beta_{i-1}(s_{i-1})} \quad (33)$$

produces an exact sample from $W(\xi)/Z_G$ when $0 < Z_G < \infty$ and $\tau_a = 1$. This is the same telescoping argument as the proposition, restricted to the fixed retained graph rather than a second exactness claim.

Corollary A.4 (Hard-DFA conditioning). *With $\eta_C(a_L) = \mathbf{1}[a_L \in \mathcal{A}_{\text{accept}}]$ and no soft reward factors, exact replay samples the retained base distribution conditioned on DFA acceptance. This indicator is independent of λ , so hard constraints remain active even when soft guidance has zero strength. If no accepting path exists, $Z_G = 0$ and the correct behavior is a fail-closed infeasibility record.*

Why non-unit ancestral temperature is different. Dividing each prefix-conditional logit by $\tau_a \neq 1$ defines a valid tempered policy. Because the backward message in one conditional also changes the state reached by later conditionals, the product of these locally tempered conditionals is not generally proportional to a single global power $W(\xi)^{1/\tau_a}$. We therefore report it as a policy choice rather than as an exact sample from Eq. (3).

For example, consider three complete paths with weights (1, 1, 4), where the first two share their first branch. At $\tau_a = 2$, locally tempering the prefix conditionals gives probabilities approximately (0.2071, 0.2071, 0.5858), whereas globally normalizing the square-root path weights gives (0.25, 0.25, 0.50). Positive local temperature can preserve hard zero support, but it does not preserve the unit-temperature sampling law.

B IMPLEMENTATION AND COMPUTATIONAL COST

B.1 GRAPH-LEVEL TIME AND MEMORY

Let $V_i \subseteq \mathcal{N}$ be the retained states at level i and E_i the retained edges from level $i - 1$ to i . Write $|V| = \sum_i |V_i|$ and $|E| = \sum_i |E_i|$.

Theorem B.1 (Finite-graph complexity). *The backward partition computation takes $\mathcal{O}(|E|)$ arithmetic operations. Retaining all messages for replay uses $\mathcal{O}(|V|)$ message memory; partition-only inference can stream levels using $\mathcal{O}(\max_i |V_i|)$ message memory. One replay is no more expensive than enumerating the outgoing edges of its L visited states and is dominated by the preceding backward pass.*

Proof. Every backward message sums each outgoing retained edge once, so the total work is linear in the edge list. A stored scalar message per retained vertex gives the replay bound; if no replay is required, the acyclic recurrence needs only two adjacent levels. Replay visits exactly one state per level. $\square$

For candidate width K , H carrier states, and M retained reward states, a dense Cartesian graph has $\mathcal{O}(LMH)$ vertices and at most $\mathcal{O}(LKM^2)$ edges. The deterministic automaton transition fixes the next reward state; it does not introduce another factor of M . With the identity carrier, $H = 1$ and the time bound is $\mathcal{O}(LKM)$. In the implemented batched version, batch size multiplies graph work while enabling GPU parallelism; padding and packing determine the constant factor.

These bounds begin after the finite graph is specified. They do not make graph construction polynomial in every compact problem description: bounded stacks, concept bit masks, multiple controller products, and explicit Sudoku support can make the expanded state space large. Reported computational cost therefore separates support construction or pre-solving, retained edge storage, message workspace, backward arithmetic, and host-model calls. The $\mathcal{O}(|E|)$ and $\mathcal{O}(|V|)$ statements apply only to message passing on the materialized graph.

B.2 MEASURED FULL-GENERATION TIME

The graph-work bound alone does not determine wall time. Wide product states can require specialized GPU reductions and sampling operators to avoid many small launches and host-device synchronizations. We implemented targeted fast paths, including batched message passing and fused ancestral sampling, but did not exhaustively engineer a separate kernel for every task and hardware setting. Tab. 3 measures the resulting implementations; it is not a lower bound on the method’s attainable latency.

The primary measurements use NVIDIA RTX 4090 GPUs; measurements from a separate cloud GPU environment are marked in the table. Each row uses the frozen Full schedule: $b = 32$ for Dyck, CommonGen, and RTP, $b = 64$ for Sudoku, $b = 48$ for DNA, and one editable site per update for Protein-1YCR. Models and task-specific configurations follow Tab. 1 and the DEV selections in Tab. 10. Each reported window generates 64 final outputs with the method’s native internal particle, classifier, or search work. Static model loading is separate. Timed steady-state windows follow a real warmup; labeled first-request windows include Graph capture or just-in-time kernel setup. CUDA is synchronized before and after complete generation from prepared inputs to CPU-available tokens.

Request-specific controller construction, dynamic programming, ancestral sampling, transfers, and online model calls are included; independent evaluation is excluded. External output batches and precision follow each frozen implementation. Ratios are interpreted only within a matched GPU environment, precision, external batch, and timer boundary; input or cohort differences do not by themselves establish an algorithmic speed difference.

Table 3: Complete online generation time in seconds for 64 final outputs at each task’s frozen Full budget. Base is a compute reference; bold identifies the fastest measured non-Base baseline within a GPU environment. BoN-4 is excluded. Static model loading, warmup, disk output, and independent evaluation are excluded. Per-request controller construction, inference, sampling, transfers, and actual extra model calls are included; early stopping is retained. [†]Measurements from a separate cloud GPU environment are shown for context and must not be divided by primary RTX 4090 measurements in the same cell. [‡]This D-CBG setting failed its predeclared DEV PPL cap; its measured time remains visible. The RTP/LLaDA DG-TAG and GILC ranges reverse order across repeats and use different native external batches. The LLaDA/Sudoku MDM range includes a different-card repeat; the same-GPU comparison with COFFEE uses 72.364. ^WReused static Graph, with complete generation timed; ^ffirst request including Graph capture. Times with different native batches, cohorts, or software stacks are descriptive unless the measurement conditions are matched.

Task / backbone	Base	CDD	CDM	D-CBG	DG-TAG	GILC-DB	MDM-VGB	COFFEE
Dyck / Dream	6.249	96.966	51.076	82.366	121.766	443.709	406.640	13.940
Dyck / LLaDA	6.237	107.607	76.587	107.587	136.590	469.933	389.544	12.086
Sudoku / Dream	50.592	105.776	67.333	95.105	83.739	111.114	53.027	56.295
Sudoku / LLaDA	69.252	110.038	81.719	110.513	101.191	112.844	71.603–72.364	75.136
CommonGen / Dream	20.121	38.690	111.330	20.272[‡]	80.754	30.454–30.649	624.670	109.432
CommonGen / LLaDA	15.428	68.535	152.613	79.558	76.392	62.749	590.824	65.442
RTP / Dream	21.041	116.940	106.992	719.688	131.728	21.094	590.266	76.466
RTP / LLaDA	20.596	129.462	1098.473	102.751	93.482–93.703	92.419–96.943	821.833	154.703
DeepSTARR / D3LM	0.917 [†] /1.210	0.968[†]/1.254	6.996 [†]	146.770 [†]	31.984 [†]	26.463 [†]	17.800 [†]	4.212 ^W
APARENT / D3LM	1.200	33.774	10.311	58.430	2.563–2.579	18.290–18.436	4.105	0.977 ^W
K562 / D3LM	0.917 [†] /1.205	1.536[†]/2.013	6.593 [†]	4.542 [†] /5.108	31.926 [†]	19.861 [†]	21.745 [†]	0.985 ^W
Protein-1YCR / EvoDiff	36.390	38.790	292.733	38.831	39.588	49.397	59.609	16.484 ^f

B.3 WHAT DOES AND DOES NOT NEED A CONVERGENCE THEOREM

The backward pass is a finite acyclic recursion, not an iterative fixed-point algorithm: after exactly L levels it has computed the partition and all suffix masses on the retained graph. Accordingly, its relevant theorem is exactness and finite complexity, not asymptotic convergence.

For a fixed selected feature design, the scorer objective in Eq. (37) is convex. This follows because binary logistic loss is convex in its affine logit, while the ℓ_1 and squared ℓ_2 penalties are convex. If both target classes occur and the token and AC coefficient blocks have positive ℓ_2 penalties, the objective is coercive and has at least one finite minimizer; it is strongly convex in the regularized coefficient subspace. These facts justify a global rather than local fitting target.

The implementation reports numerical optimizer termination, iterations, and held-out metrics. We do not claim a new optimizer rate for its mixed ℓ_1/ℓ_2 objective; such a rate would require a specified proximal solver and optimality residual, or a smooth reformulation. Likewise, carrier training and the frozen diffusion model are empirical estimation procedures; their diagnostics do not imply convergence to a global population optimum. Tab. 4 summarizes these claim boundaries.

Table 4: Claim boundaries for “convergence.”

Component	Formal statement	Empirical evidence
Backward DP	finite exact recursion	graph/support sizes
Ancestral replay	exact at $\tau_a = 1$	sampling rule and seed
Scorer fit	convex fixed-design objective	solver status and validation metrics
Carrier fit	no global-optimum claim	epoch/loss/convergence flag
Diffusion host	frozen	checkpoint and schedule

C CARRIER AND OBJECTIVE CONSTRUCTION

C.1 CARRIER ASSETS AND SCOPE

The carrier is part of every query, but its realization is asset specific. A structured HMM or Markov carrier contributes target-independent sequence statistics; a one-state identity carrier is the neutral finite-state instance. Non-identity carriers follow the same target-free CoDD-style training procedure (Li et al., 2026), with asset-specific data, state size, block length, and frozen checkpoint. The identity carrier requires no training. The LLaDA language artifact is trained on WikiText-103 (Merity et al., 2017), has 64 latent states, uses block length 32, and occupies 30.88 MiB when serialized. It is frozen before task-specific objective fitting, while Dream, D3LM, and Protein use their own frozen carrier configurations.

C.2 MINING, SELECTION, AND FITTING

Alg. 1 separates reusable corpus processing from target-dependent statistics. Mining never reads labels; changing the target reuses its candidate set and count matrices and reruns only selection and fitting.

Objective-agnostic candidate grammar. For training rows $x^{(1)}, \dots, x^{(N)}$, the document frequency of token pattern p is

$$\text{df}(p) = \sum_{n=1}^N \mathbf{1}[p \text{ occurs in } x^{(n)}].$$

The miner enumerates literal token n -grams of orders one through four and keeps a pattern only when $m_{|p|} \leq \text{df}(p) \leq \rho N$. The default thresholds are $(m_1, m_2, m_3, m_4) = (8, 5, 3, 3)$ and $\rho = 0.70$; deterministic ordering by decreasing document frequency, order, and token tuple applies the 80,000-candidate resource cap. Mining reads neither the target labels nor validation rows. The stored sparse matrix uses occurrence counts

$$X_{nj} = c_j(x^{(n)}),$$

not binary presence, so training and inference agree when a pattern repeats or overlaps itself.

Algorithm 1 Build and compile a count-logit reward

Require: tokenized training text; training labels; validation text and labels; document-frequency limits; feature orders 1:4

Ensure: signed token weights, weighted phrase automaton, validation report, and one decision record per candidate

```

1:  $\mathcal{C} \leftarrow \text{MINEGRAMS}(\text{training text}, 1:4, \text{frequency limits})$ 
2:  $X_{\text{train}}, X_{\text{val}} \leftarrow \text{COUNTOCCURRENCES}(\mathcal{C}, \text{training text}, \text{validation text}) \triangleright$  no labels used above
3:  $\mathcal{S} \leftarrow \emptyset$ 
4: for  $n = 1, \dots, 4$  do
5:   for candidate  $c \in \mathcal{C}$  of order  $n$  do
6:      $d_c \leftarrow \text{RESIDUALIZEDLOGISTICTEST}(X_{\text{train}}[:, c], \text{training labels}, \mathcal{S})$ 
7:     apply within-order false discovery rate (FDR) correction to all  $d_c$ 
8:      $\mathcal{A}_n \leftarrow \text{APPLYGATESANDCAPS}(\{d_c : |c| = n\}, \mathcal{S}) \triangleright$  stability, artifact, heredity, and
       child-over-parent gates
9:      $\mathcal{S} \leftarrow \mathcal{S} \cup \mathcal{A}_n$ 
10:  $(b, u, w) \leftarrow \text{FITREGULARIZEDLOGISTIC}(X_{\text{train}}[:, \mathcal{S}], \text{training labels})$ 
11: report  $\leftarrow \text{EVALUATEONLY}(b, u, w, X_{\text{val}}, \text{validation labels})$ 
12: automaton  $\leftarrow \text{COMPILEAHO CORASICK}(\mathcal{S}, w)$ 
13: return  $(b, u, \text{automaton}, \text{report}, \{d_c : c \in \mathcal{C}\})$ 

```

Residualized short-to-long score test. At feature order k , let H_k contain an intercept, five label-free text diagnostics (log length, unique-token fraction, repeated-bigram fraction, maximum-run fraction, and punctuation fraction), and the features accepted at orders below k . A class-weighted

ridge logistic null fit gives probabilities p , residual $r = \omega \odot (y - p)$, and $D = \text{diag}(\omega \odot p \odot (1 - p))$. For candidate count column c_j , the residualized score and information are

$$U_j = c_j^\top r, \quad (34)$$

$$I_j = c_j^\top D c_j - c_j^\top D H_k (H_k^\top D H_k + \gamma P)^{-1} H_k^\top D c_j, \quad (35)$$

$$Z_j = U_j / \sqrt{I_j}, \quad (36)$$

where P leaves the intercept unpenalized. We convert $|Z_j|$ to a two-sided normal p -value; γ is the null-fit ridge strength. We apply Benjamini–Hochberg correction within each order (Benjamini & Hochberg, 1995).

A candidate then passes five transparent gates: corrected $q \leq 0.05$ and $|Z_j| \geq 2$; absolute correlation at most 0.98 with every text diagnostic; at least one selected prefix or suffix parent for orders above one; at least a 2% gain over the strongest same-sign parent; and matching sign plus significance in at least four of five stratified 70% training subsamples. Survivors are ordered by corrected q , $|Z|$, document frequency, and token tuple before per-order and global resource caps are applied. The accepted columns are appended to H_k before testing order $k + 1$; the readable reference defaults cap each order at 64 and the complete selection at 256. Every candidate has a decision record containing its statistic and first rejection reason. Training and inference both count every occurrence, including overlaps. Validation data report the area under the receiver operating characteristic curve (AUC), balanced accuracy, and log loss but never enter the fit or these gates.

We use these gates as a reproducible screening procedure. The paper does not claim that the final, adaptively constructed dictionary has a finite-sample 5% false-discovery-rate guarantee: such a claim would additionally require the calibration and dependence assumptions of the individual score tests and the sequential selection procedure.

With binary training targets y_n , token coefficients u , selected-pattern coefficients w , and count-semantic feature values c_j , the fitted scorer uses binary cross-entropy (BCE),

$$R_\phi(x) = b + \sum_i u_{x_i} + \sum_j w_j c_j(x)$$

and minimizes

$$\begin{aligned} \mathcal{L}(\phi) = \frac{1}{N} \sum_{n=1}^N \text{BCE}(y_n, \sigma(R_\phi(x^{(n)}))) \\ + \alpha_u \|u\|_2^2 + \alpha_1 \|w\|_1 + \alpha_2 \|w\|_2^2. \end{aligned} \quad (37)$$

The sigmoid belongs to the supervised fit and to diagnostic probabilities. The generation-time factor uses the signed energy R_ϕ itself, as stated in Eq. (3).

Eq. 37 is the logistic special case, not a universal training law. RTP uses a backbone- and cohort-bound binary or soft-toxicity asset. Malinois uses a target-highest binary objective with reverse-complement tied sixmer features. DeepSTARR and APARENT use their frozen asset-specific regression objectives. The exact feature grammar, labels, loss, regularization, and coefficients are task specific rather than inferred from the task name. CommonGen trains no scorer: its terminal $0 / -\infty$ DFA is fixed by each record. Offline scorer accuracy is diagnostic; only frozen generation followed by the independent task evaluator supports a result claim.

C.3 TASK-SPECIFIC CONTROLLER CONSTRUCTION

The inference engine sees only the finite-state interface, but the compiler and scored text scope are task specific. Tab. 5 states the complete mapping. The learned controllers are weighted deterministic automata, not hard accept/reject DFAs; CommonGen is the terminal hard-DFA instance.

Table 5: How each task becomes a controller. Literal feature mining is shared in form but labels and fitted weights are task specific. CommonGen, Dyck, and Sudoku have no learned count-logit reward. Protein bigrams are chronological action-order features, not adjacent residues in the final sequence.

Task	Scored scope	Automatic controller construction	Terminal rule
RTP	generated continuation only	Mine and select train-only count features for 1[continuation toxicity < 0.2]; compile signed token terms and selected phrase weights into one weighted AC machine.	zero for every state
Common Gen	generated sentence	For each record, enumerate standalone base, regular-plural, and possessive forms; tokenize them and compile the reachable lexical-prefix state plus a satisfied-concept bit mask.	0 iff every required concept is complete and no forbidden concept is hit; $-\infty$ otherwise
Dyck repair	12 locked prefix tokens plus 20 repaired suffix tokens	Compile a bounded-stack graph, intersect forward/backward min-plus optima, then attach frozen evidence and carrier weights.	empty stack at length 32 and exact minimum substitution distance
DeepSTARR	complete 48-token DNA sequence	Compile the frozen order-4 occurrence-count energy into token and automaton terms.	zero for every state
APARENT	complete 48-token DNA sequence	Compile the frozen token-unigram regression energy.	zero for every state
Malinois	complete 48-token DNA sequence	Compile the target-specific reverse-complement-tied sixmer/token-unigram energy.	zero for every state
Sudoku	editable cells with clues locked	Enumerate legal completions under the standard row, column, and box rules, then build a layered joint-support graph over the scheduled cells. The objective state records the retained completion prefix.	one iff the terminal prefix is a declared legal completion; zero otherwise
Protein-1YCR	chronological editable-action sequence with motif locks	Compile 20 unigram, 400 action-order bigram, and 320 action-position weights fitted on partial action prefixes; replay uses the same editable action order and full 20-amino-acid support.	zero for every state

Algorithm 2 Compile a task-specific controller

Require: task t ; task record; tokenizer; declared candidate support; selected patterns and fitted weights when t is learned

Ensure: token energies plus a finite-state controller

- 1: **if** $t \in \{\text{RTP}, \text{DeepSTARR}, \text{APARENT}, \text{Malinois}\}$ **then**
 - 2: place every fitted unigram weight in the token-energy table
 - 3: insert every selected phrase and its signed weight into a token trie
 - 4: add failure links and propagate terminal weights along those links
 - 5: **return** token energies and the resulting weighted AC controller
 - 6: **if** $t = \text{CommonGen}$ **then**
 - 7: **for** concept c in the record **do**
 - 8: $V_c \leftarrow \text{STANDALONEFORMS}(c, \text{base}, \text{plural}, \text{possessive})$
 - 9: $T_c \leftarrow \text{TOKENIZEWITHBOUNDARIES}(V_c, \text{tokenizer})$
 - 10: build a prefix matcher over $\bigcup_c T_c$
 - 11: initial DFA state $\leftarrow$ (empty active prefixes, zero concept mask, not rejected)
 - 12: breadth-first enumerate transitions on the declared support; update active prefixes, completed-concept bits, and the reject flag
 - 13: terminal score $\leftarrow$ 0 iff all required bits are set and not rejected; $-\infty$ otherwise
 - 14: **return** zero token energies and the reachable hard DFA
 - 15: **return** UNSUPPORTEDTASK(t)
-

For learned tasks, fixed context is consumed before the scored scope to obtain the carrier and automaton boundary state, and rewards are accumulated only on the declared continuation or biological output sequence. For CommonGen, word boundary handling belongs to the tokenizer adapter. The same accepted token strings define both generation and exact evaluation. This prevents evaluator-only morphology rules from silently differing from the DFA used during generation.

D EXPERIMENTAL SETUP AND EVALUATION

Tab. 6 summarizes the evaluation contracts.

Table 6: Task and evaluator contracts. The scorer used for guidance is not the sole evaluator.

Task	Generation problem	Target / constraint		Primary control metric	Quality and audit metrics
RTP	prompt continuation	non-toxic continuation		ToxicBERT continuation toxicity and satisfaction	prompt-conditioned GPT-2-large corpus PPL
Common Gen	concept realization	terminal DFA acceptance	lexical fail-closed all-concept satisfaction		exact/normalized coverage; forbidden hits; unreachable support; conditional PPL
Dyck	fixed-length repair	valid edit completion	minimum-	exact validity	all-output Hamming edit and legal-edge rate
Sudoku	clue-preserving completion	com- valid 9×9 grid		exact validity	clue preservation and output format
DeepSTARR	unconditional generation	DNA developmental activity	ac-	official DeepSTARR H5 predictor	native masked LOO and failure count
APARENT	unconditional generation	DNA isoform usage		official APARENT H5 predictor	native masked LOO and diversity diagnostics
Malinois	cell-type-specific DNA generation	target exceeds non-target	score both	target-highest rate	target margin, native masked LOO, and failure count
Protein-1YCR	motif-scaffold completion	low motif after folding	RMSD	Success@1Å	mean motif RMSD, evaluator coverage, and model/oracle work

The split law is uniform: fitted components use TRAIN only, hyperparameters use DEV only, and a frozen configuration is evaluated once on its declared final panel. CommonGen uses 993 DEV records and 1,497 disjoint TEST records. Dyck uses 1,024 DEV inputs and 9,798 evaluation inputs. Sudoku uses 64 development puzzles from PRISM training solutions and its released 2,000-puzzle hard validation file (Kim et al., 2025), as redistributed by MDM-VGB (Jeon et al., 2026); we do not call it an independently certified test split.

The final panels are fixed benchmark cohorts. Some were evaluated earlier in this study and are therefore not new prospective holdouts. For each reported system, fitting uses TRAIN data and configuration selection uses DEV data; no final-panel metric selects its configuration. The stated source disjointness concerns these experimental records and does not certify that the pretrained backbone never encountered similar data.

RTP is a shared stress benchmark rather than a population estimate: its 1,024 prompts are selected by toxicity of a frozen diffusion-only continuation, and the identical ordered prompt IDs are then used for every method. No guided method defines its own panel. DNA experiments use 1,000 unconditional draws per displayed system. These are independent frozen-system samples with a common backbone, output contract, predictor, and sample count; they are not paired molecules and do not imply unseen biological generalization.

D.1 METRIC COMPUTATION

For N outputs, hard satisfaction is $N^{-1} \sum_n \mathbf{1}[V(x^{(n)})]$. Sudoku validity V requires correct output format, clue preservation, and all row, column, and box rules. Its separate clue score is the fraction of outputs preserving every given clue. CommonGen validity requires every requested concept under the accepted-form and word-boundary rules. Dyck validity checks bracket balance and type matching, while mean edit distance is the symbol-level Hamming distance to the input averaged over all outputs, including invalid ones. Minimum-edit optimality is verified separately against the exact repair cost.

RTP non-toxicity is $N^{-1} \sum_n \mathbf{1}[t_n < 0.5]$, where t_n is the generated continuation’s `unitary/toxic-bert@4d6c22e74ba2` score (Hanu & Unitary team, 2020). Prompt-conditioned `openai-community/gpt2-large@32b71b12589c` corpus perplexity (Radford et al., 2019) is $\exp(\sum_n \text{NLL}_n / \sum_n T_n)$, where NLL denotes negative log-likelihood and T_n counts scored output tokens. The prompt supplies context but contributes neither loss nor tokens to that denominator. Corpus PPL aggregates token losses before exponentiation.

For DNA, the declared task crop is scored by the official predictor. DeepSTARR and APARENT report the mean target output over successfully scored sequences, with scoring failures recorded separately. DeepSTARR Pass@95 is the fraction of all generated sequences reaching the fixed activity threshold. Malinois target-highest rate is the fraction whose target-cell score strictly exceeds both other cell scores. Native D3LM masked LOO masks one token at a time, records the original token’s negative log probability with all other tokens visible, averages those losses over all scored tokens, and exponentiates. It is a pseudo-perplexity, not a normalized joint likelihood or a target-activity metric.

Protein motif RMSD compares the declared motif atoms in the OmegaFold structure with the reference under the evaluator’s alignment. Mean RMSD averages these per-output distances. Success@1Å is $N^{-1} \sum_n \mathbf{1}[\text{RMSD}_n \leq 1 \text{ Å}]$. Satisfaction, isoform usage, target-highest, and success rates are displayed as percentages in the main tables.

The remaining setup details are organized in App. D.2 (inputs and prompts), App. E (baseline adaptations), and App. E.1 (generation and selection).

D.2 EXACT GENERATION PROMPT CONTRACTS

We freeze prompts as part of the experimental condition. Diffusion-only, carrier-only, learned guidance, and other algorithmic baselines receive the *formal task input* below. The prompt-only baseline receives the same record, start canvas, and generation budget, but applies the corresponding *explicit-control wrapper*. Prompt-only is therefore a named baseline, not a point in the guided-temperature sweep. Braces below denote fields filled from the frozen dataset record. Free continuations begin after the displayed suffix.

D.2.1 REALTOXICITYPROMPTS (RTP)

For diffusion-only and all algorithmic guidance methods, the model receives the dataset prefix verbatim:

{prefix}

The matched prompt-only baseline uses the frozen `rtp_prompt-only-v2` template:

Continue the text naturally and coherently using non-toxic language. Output only new text and do not repeat the given prefix.
Text: {prefix}

Only the newly generated continuation is passed to the toxicity evaluator; conditional perplexity is computed with the original prefix as context.

D.2.2 COMMONGEN

Every method receives the same concept-conditioned task prompt:

Write one short sentence using all these words: $\{\text{concept}_1\}$,
 $\dots, \{\text{concept}_m\}$.
Sentence:

This prompt states the benchmark input rather than an additional soft-control instruction. We therefore do not report a separate prompt-only CommonGen baseline. Exact control is defined by the record-conditioned terminal DFA, and acceptance requires every requested concept in the generated sentence.

D.2.3 STRUCTURED AND BIOLOGICAL INPUTS

Dyck, Sudoku, and the biological tasks use structured records rather than an additional natural-language control prompt. Dyck methods receive the same 32-token repair record with the first 12 tokens locked; Sudoku methods receive the same puzzle and clue mask. DNA methods share the D3LM backbone, 48-token output contract, target identity, and evaluator but draw independent unconditional samples. Thus language and symbolic inputs are row-matched, whereas the biological comparison is distributional rather than molecule-paired. For the 48-token DNA contract, Tab. 1 includes a $b = 48$ full-budget anchor with independently frozen method-specific DEV selections. This uses the same masked host and records 48 total token commits per trajectory; the native schedule can still contain zero- or multi-token steps. BoN and particle methods retain their additional trajectory costs. The confirmation scope, retained fixed-panel evaluations, and mode collapse are summarized in App. F. The main table displays the K562 $b = 48$ target-specific result. HepG2 and SK-N-SH are not part of the main endpoint comparison and are therefore omitted from that table; HepG2 appears only in the mechanism diagnostic in Fig. 4A. Language Full uses a 32-token chunk at $b = 32$, and Dyck may finish its 20 editable positions within that allocation. Sudoku Full uses $b = 64$ and permits at most one new cell per update, with 10–53 realized calls on the panel in Tab. 13.

E BASELINES AND HYPERPARAMETER SELECTION

Algorithmic sources are CDD (Cardei et al., 2025), CDM (Kim et al., 2026), D-CBG (Schiff et al., 2025), DG/TAG (Nisonoff et al., 2025), GILC (Dou et al., 2026), and MDM-VGB (Jeon et al., 2026). Tab. 7 summarizes each port.

Table 7: Executable baseline recipes. “Port” means our implementation of the published algorithmic idea on the frozen host backbone; it does not claim author-code parity.

Method	Implementation	Fitted object and supervision	Online rule	Reported compute
Base	host implementation	none	native reverse diffusion	b reverse updates
CDD	same-backbone port	train-only projection expert	top- k projection with augmented-Lagrangian inner updates	b plus inner-loop count I
CDM	sequential Monte Carlo (SMC) port	train-only twist	P particles with fixed proposal, effective sample size (ESS) threshold, and resampling law	task-dependent particle work; see below
D-CBG	same-backbone port	train-only corrupted-state classifier	classifier reweights token alternatives; DNA uses the declared full-vocabulary Taylor form	b updates and candidate width
DG-TAG	method-inspired port	frozen task predictor	rescore top- k successor states and update logits	b updates and predictor calls
GILC-DB	adapted port	train-only task reward model	Monte-Carlo logit correction at every reverse update	b reverse updates; MC samples reported separately
MDM-VGB	task-specific same-backbone ports	train-only verifier	LLaDA/Dyck uses native reveal/remask backtracking; other tasks retain their documented forward-value adaptations	b denoising steps, with realized search moves and verifier calls disclosed separately
COFFEE	proposed method	train-only additive reward plus target-free carrier	exact backward messages and ancestral replay on the retained product graph	b backbone updates plus DP FLOPs

For the new multi-solution Sudoku adaptation, CDM particles operate inside exact feasible-completion guidance. Its denoising-step budget counts host updates, while particle work remains a separate compute coordinate. Full-trajectory particle methods, including DNA and Protein CDM, instead incur Pb backbone row-forwards.

For conditional language and symbolic tasks, methods receive identical ordered row IDs, checkpoint, prompt or structured record, output length, evaluator, and reverse-step budget. Biological systems use independent unconditional draws under a common backbone, output contract, predictor, and sample count; we do not describe them as paired. Particle count, MC samples, search width, best-of- N , and realized NFE remain separate compute coordinates rather than being hidden inside b . The allocated denoising budget, realized committed-token count, and realized backbone NFE are distinct quantities. A global 1:1 point denotes token-complete masked denoising under the same host; no experiment here changes the host into a block-diffusion model.

To contextualize the denoising-budget comparison, Tab. 8 estimates backbone arithmetic for Base and COFFEE on the same 1,497 LLaDA/CommonGen prompts in separate efficiency runs.

Table 8: Estimated backbone TFLOPs per output in the LLaDA/CommonGen efficiency runs. We use $F \approx 2PS$ per forward, nominal $P = 8 \times 10^9$, b observed forwards, and mean padded lengths $S = 54.50$ (Base) and 53.20 (COFFEE). The length difference reflects batching. They exclude COFFEE’s dynamic programming and are neither profiled nor total FLOPs; other tasks require their own sequence lengths and model-call counts.

b	Base	COFFEE
8	6.976	6.809
32	27.903	27.238

E.1 SHARED PROTOCOL

E.1.1 FROZEN MODEL AND INFERENCE SETTINGS

Tab. 9 gives the language defaults before task-specific selection.

Table 9: Default COFFEE language configuration before benchmark-specific DEV selection. Temperatures and λ are independent controls.

Field	COFFEE language default
Diffusion checkpoint	LLaDA-8B-Base
Generation / block length	32 / 32
Denoising budget	32
Evidence temperature τ_e	1.0
Carrier-emission temperature τ_m	1.0
Ancestral temperature τ_a	1.0
Final host sampling temperature	0.0
Reward strength λ	1.0
Initial / maximum token top- k	16 / 64
Other-mass expansion threshold	0.55
State beam	32
Guided fraction	all denoising updates
Carrier states / vocabulary	64 / 126,346

This is a language default, not a universal recipe. Dream, D3LM, Protein, and task-specific controller settings follow the development-time search and selection rules in Tabs. 10 and 11. The carrier construction is described in App. C.

E.1.2 SELECTION AND STATISTICAL REPORTING

Selection is performed independently inside each denoising budget. Language tasks first maximize the declared control metric subject to the same-budget quality rule, then use the deterministic tie-break in Tab. 10. Dyck and Sudoku select by exact validity before secondary edit or clue metrics. Biological ports select on the declared DEV predictor while retaining native LOO as a separately reported trade-off; no TEST quantity selects a configuration.

For CommonGen and RTP, the common soft-language quality rule compares prompt-conditioned corpus PPL on DEV with the unguided Base for the same backbone, task, and budget:

$$\text{PPL}_{\text{candidate}}^{\text{DEV}} \leq 1.5 \text{PPL}_{\text{Base}}^{\text{DEV}}.$$

Among candidates satisfying this common cap, selection maximizes the task’s control metric. If none satisfies it, the lowest-PPL point on the DEV frontier is frozen without relaxing the cap. Its final-panel control and quality measurements are still reported for matched systems, but the point cannot support a claim that requires satisfying the cap. PPL is a quality proxy and does not by itself rule out repetitive or degenerate outputs.

Every displayed cell is one frozen system evaluated on its declared panel. Success rates use all planned outputs as their denominator. A continuous quantity that is undefined for a failed output is summarized only over evaluable outputs. The main table reports claim-facing metrics, while App. F records only the failure or coverage qualifications needed to interpret those claims. A dash denotes an unavailable or inapplicable measurement rather than zero. Paired intervals are used only when systems share the same input rows and a paired resampling unit; independent DNA draws are not assigned paired intervals. Small numerical differences on unpaired panels are treated as descriptive rather than as significance claims.

Table 10: Selection contracts for the results discussed in the main paper. No final-panel metric is used to choose a configuration.

Benchmark	Development data	Final panel	Frozen selection rule and interpretation
CommonGen	993 records, with 992 in the corrected common pool	1,497 disjoint records	Maximize exact lexical acceptance under the common PPL cap, followed by coverage, PPL, and strength tie breaks.
RTP	Method-independent development panel	Common prompt stress selected by toxicity	Maximize non-toxicity under the same-budget quality rule. Results describe this stress panel rather than population-average RTP behavior.
Dyck	1,024 inputs	9,798 disjoint inputs	Maximize exact validity, then minimize all-output edit distance. Independent minimum-repair verification is reported only for the audited configurations described in Sec. H.2.
Sudoku	64 puzzles constructed from released training solutions	Released 2,000-puzzle hard panel	Maximize validity, then clue preservation, format, model work, and grid order. The upstream panel is named validation and is not described as an independently certified test set.
DNA	Task-specific frozen development systems	1,000 outputs per frozen system	Select by the declared predictor on development data. Native LOO and diversity remain separate diagnostics. Comparisons are distributional rather than molecule paired.
Protein-1YCR	Common development geometries	Common geometry panel	400- Maximize Success@1Å, then minimize mean motif RMSD and evaluator work. Particle methods retain their additional model and evaluator calls.

F MAIN-CLAIM SUPPORT AND RESULT QUALIFICATIONS

Tab. 1 and Fig. 3 contain the claim-facing numerical results. The appendix records only the additional qualifications needed to interpret those results rather than repeating every numerical cell already visible in the table and budget curves.

All endpoints in Tab. 1 are frozen final-panel outcomes and remain numerically ranked on the displayed metrics. Mode collapse and quality-gate failures remain disclosed through the reported quality and diversity diagnostics rather than turning those TEST outcomes into report-only results.

A hollow marker in Fig. 3 denotes a point outside the standard comparison set. The map below lists every such point. Report-only points are lower-budget archival diagnostics excluded from standard ranking, while K562 points are separately qualified. No oracle, reference, or quality-cap-failed point is plotted.

Table 11: Development-time search axes for the methods shown in the main comparison. Batch size is an execution choice rather than a selected scientific parameter. Particle, candidate, and verifier work remain separate from the denoising-step budget.

Method	Parameters searched on development data	Computation fixed before final evaluation
COFFEE	Language evidence, carrier, and ancestral temperatures in $\{0.3, 0.6, 0.9\}$, followed by reward strengths in $\{0.5, 1, 2, 4, 8\}$ for declared representatives. Biological scale and temperature are selected separately for each task.	Carrier, compiled objective, retained support rule, and backbone checkpoint.
CDD	Projection strength $\eta \in \{0.2, 0.4, 0.6, 0.8\}$, initial multiplier $\mu_0 \in \{1, 5, 10\}$, and inner iterations $I \in \{10, 25, 50\}$ where applicable.	Projection expert, candidate width, and outer update schedule.
CDM	Twist strength $\beta \in \{0.1, 0.2, 2\}$ for language, with task-specific biological refinements.	Particle count, proposal, effective-sample-size threshold, and resampling rule.
D-CBG	Classifier strength $\gamma \in \{0.5, 1, 2\}$, with separately selected full-vocabulary scales for Malinois.	Corrupted-state classifier and candidate rule.
DG-TAG	Rescoring strength $\gamma \in \{1, 5, 20\}$, plus the declared 0.1 CommonGen refinement.	Frozen task predictor and top- k successor set.
GILC-DB	Language strength $\beta \in \{0.1, 0.3, 1, 3, 10\}$, with task-specific biological scale refinements.	Reward model, Monte Carlo sample count, and candidate width.
MDM-VGB	Step-matched language and symbolic strength $\lambda \in \{0, 0.05, 2, 8\}$ and biological strength $\lambda \in \{0.5, 2, 8\}$.	Frozen verifier and the host schedule capped at the reported budget.

Report-only points. CommonGen / Dream, CDD (4), D-CBG (4, 16); RTP / Dream, CDD (16), D-CBG (4), COFFEE (4, 16); DeepSTARR, D-CBG (4), GILC-DB (4, 16); CommonGen / LLaDA, CDD (4), D-CBG (4, 16); RTP / LLaDA, CDD (4, 16), D-CBG (4).

Separately qualified points. K562, D-CBG (16), GILC-DB (16).

Tab. 12 summarizes the main claim boundaries.

Table 12: Additional evidence and claim boundaries for the results interpreted in the main text.

Main-text result	Additional evidence	Required interpretation
Dyck repair	The compiler constructs the minimum-substitution valid support before probabilistic replay. On the two independently audited full-panel files, every returned output matches an independently recomputed optimum.	The independent audit covers the stated Dream $b = 4$ and LLaDA $b = 32$ configurations. It is not a blanket empirical certificate for every budget.
Multi-solution Sudoku	COFFEE and the support-aware CDM adaptation preserve validity across the displayed budgets. Sec. H.1 separately compares coherent joint replay with independent exact marginals.	Solver-assisted adapters share exact feasible-completion information. Their results test how parallel choices are coupled, not whether one method discovered the Sudoku solution set without a solver.
CommonGen and RTP	CommonGen uses a record-conditioned hard automaton. RTP uses a learned soft objective on a common 1,024-prompt stress panel.	Full lexical acceptance and toxicity reduction answer different questions. RTP values are stress-panel measurements and not population estimates.
Regulatory DNA	K562 has 32 distinct token sequences among 1,000 COFFEE outputs. DeepSTARR produces one distinct all-T sequence despite favorable activity and native LOO.	Predictor scores and native LOO do not establish diversity, biological function, or experimental efficacy. DNA systems are independent frozen draws rather than paired molecules.
Protein-1YCR	Success@1Å and mean motif RMSD are computed on the common 400-geometry panel.	Both metrics use the same OmegaFold evaluation family, one motif, and project adaptations. They are not independent wet-lab validation.

G CANONICAL ALGORITHMS AND FAILURE SEMANTICS

G.1 THE FIXED-STEP COMPILED UPDATE

The following pseudocode gives the fixed-step inference and sampling procedure used in Sec. 2.4. Its factors are fixed before the backward pass; support and numerical implementation details are discussed in the surrounding appendix.

Algorithm 3 One COFFEE-guided diffusion update

Require: current sequence x_t ; frozen denoiser; carrier factors $K_{1:L}$; compiled objective $(\delta_{C,1:L}, \psi_{C,1:L}, \eta_C)$; host reverse transition q_{host}

Ensure: next diffusion state x_{t-1}

- 1: Build the clamped unary evidence $e_{t,1:L}$ using Eq. 2.
- 2: Set $M_L(h, a) \leftarrow \eta_C(a)$ for every terminal product state (h, a) .
- 3: **for** $i = L, L-1, \dots, 1$ **do**
- 4: Compute M_{i-1} from M_i using Eq. 15.
- 5: **if** $M_0(h_0, a_{\text{init}}) = 0$ **then**
- 6: **return** NOPOSITIVEMASS(retained support)
- 7: $(h, a) \leftarrow (h_0, a_{\text{init}})$
- 8: **for** $i = 1, 2, \dots, L$ **do**
- 9: Sample (u, h') with probability proportional to
 $e_{t,i}(u)K_i(h, u, h')\psi_{C,i}(a, u)$
 $\cdot M_i(h', \delta_{C,i}(a, u))$.
- 10: $\tilde{x}_0 \leftarrow u$; $(h, a) \leftarrow (h', \delta_{C,i}(a, u))$.
- 11: Sample $x_{t-1} \sim q_{\text{host}}(x_{t-1} \mid x_t, \tilde{x}_0)$
using the host model's original proposal-to-state rule.
- 12: **return** x_{t-1}

Algorithm 4 Strict minimum-edit repair with frozen evidence

Require: reference y ; locked positions F ; per-position candidates $C_{1:L}$; bounded-language transition δ ; frozen evidence; target-free carrier; random seed

Ensure: one globally minimum-edit valid repair or a fail-closed record

- 1: initialize forward min-plus cost $D_0(a_0) = 0$ and $D_0(a) = \infty$ otherwise
- 2: **for** $i = 1, \dots, L$ **do**
- 3: $D_i(a') \leftarrow \min_{a,v:\delta(a,v)=a'} [D_{i-1}(a) + \mathbf{1}[v \neq y_i]]$, respecting F and C_i
- 4: run the symmetric backward min-plus recursion to obtain suffix costs
- 5: $d^* \leftarrow$ minimum terminal forward cost
- 6: **for** every layered edge (i, a, v, a') **do**
- 7: retain the edge iff prefix cost + edit cost + suffix cost equals d^*
- 8: **if** the retained graph has no accepting terminal path **then**
- 9: **return** NOFEASIBLEREPAIR(declared support)
- 10: attach frozen evidence and carrier scores to every retained edge
- 11: run sum-product backward messages on the retained graph
- 12: **if** the root message $M_0(h_0, a_0) = 0$ **then**
- 13: **return** NOPOSITIVEMASS(retained support)
- 14: $x \leftarrow$ ANCESTRALREPLAY(messages, seed)
- 15: **return** $(x, \{i : x_i \neq y_i\}, d^*)$

The min-plus stage is score free: it determines the exact feasible edit support. The later sum-product stage changes only the relative probability of tied minimum-edit repairs. A resource limit returns a separate resource-failure record rather than dropping states as an unreported beam or being mislabeled as mathematical infeasibility.

Log-domain implementation. The production backend stores $m_i(s) = \log M_i(s)$ and replaces every sum in the backward recurrence by log-sum-exp. At unit ancestral temperature, the replay logit for edge $e : s \rightarrow s'$ is $g_i(e) + m_i(s')$; this is Eq. 33 in log space and does not introduce a second message named B . Compatible rows are batched without changing the sampling law.

Failure records. The implementation distinguishes an unsatisfiable hard objective on the declared support, zero positive carrier-objective mass on an otherwise feasible retained graph, a resource-limit abort during graph construction, and a numerical failure. Only the first two are mathematical support outcomes; resource and numerical failures are reported separately and never relabeled as infeasibility.

H GUIDANCE DYNAMICS AND DIAGNOSTIC EXPERIMENTS

H.1 MULTI-SOLUTION SUDOKU JOINT CONSISTENCY

The TRAIN-derived 120-puzzle diagnostic uses one source-disjoint seed and fixed settings. Joint replay, independent exact marginals, and the joint reference share the same 64-bit floating-point (FP64) conditional scores, decoder, and confidence rule; D-CBG uses a different feasibility-derived confidence source. Joint replay, uniform joint sampling, and the reference all reach 120/120, while independent marginals fail at smaller budgets. This supports the need for coherent joint sampling under parallel commits; because uniform joint sampling also succeeds, it does not establish a validity gain from learned carrier weighting.

Table 13: Multi-solution Sudoku: joint consistency under parallel commitments. Entries count valid, clue-preserving outputs out of 120 puzzles; 40 puzzles have 2, 3–8, and 9–32 solutions, respectively. This is a TRAIN-derived, source-disjoint exploratory panel with one seed and fixed diagnostic settings, not the 2,000-puzzle evaluation or a complete-baseline comparison. Full ($b = 64$) permits at most one new cell per step, with 10–53 actual calls. The FP64 joint reference and independent-marginal row use identical conditional scores, support, temperature, decoder, and confidence rule; proposals may lead to different subsequent commit positions. Uniform joint still uses model-based commit ordering.

Method	$b = 4$	$b = 8$	$b = 16$	$b = 32$	Full ($b = 64$)
Joint replay	120	120	120	120	120
Independent exact marginals	68	100	114	118	120
Uniform joint	120	120	120	120	120
D-CBG	13	40	71	113	120
Joint reference	120	120	120	120	120
Maximum cells committed per step	14	7	4	2	1

H.2 MINIMUM-EDIT REPAIR DEVELOPMENT DIAGNOSTIC

The diagnostic fixes a 12-token valid source prefix, repairs a 20-token suffix, and uses four bracket tokens with a bounded Dyck stack. On 9,877 invalid development leaves, every returned sequence is valid and globally minimum-edit within the declared support; mean edit distance is 8.283 and masked-suffix pseudo-perplexity is 12.27. A matched MDM-VGB port repairs 28.41% of rows; its valid subset has mean edit distance 10.57 and pseudo-perplexity 10.21. These are shared-LLaDA DEV diagnostics, not held-out evidence or a reproduction of the original MDM-VGB experiment.

H.3 GUIDANCE DYNAMICS AND FROZEN-QUERY DIAGNOSTICS

Panel A of Fig. 4 uses 64 shared HepG2 IDs under the same identity carrier, host schedule, and retained-support rule. Its ribbons count transitions of each rollout’s complete clean proposal between displayed updates; they are not probability flow. The scorer-on and $W_C \equiv 1$ arms therefore describe proposal trajectories under two frozen systems rather than an intervention that isolates cross-position lookahead.

Panels B–C use nine distinct frozen K562 $b = 4$ queries. For a fixed conditioning state $z = (h, a, x_0^{<i})$, the Full and Local action distributions share denoiser evidence, carrier factors, current objective weight, and retained support. The Full conditional uses the target-weighted continuation message M_i , whereas Local replaces only that message with the neutral continuation mass B_i . Panel B selects one query at position 25 and one prefix product state, then varies the future objective horizon d : the objective factors at positions $i + 1, \dots, i + d$ are included, while those after $i + d$ are set

to one. The entire 48-token lattice, including suffix denoiser evidence, carrier factors, candidate support, and automaton state transitions, remains intact. Thus $d = 0$ reproduces Local and $d = 23$ reproduces Full for the same fixed prefix. The intermediate points are controlled recalculations, not diffusion-time updates. In this query, the probability of AAAAAA is 0.771 at $d = 0$ or 1, 0.643 at $d = 2$, and 0.500 from $d = 3$ through 23. Positions 27 and 28 are observed AAAAAA tokens in the frozen state; enabling their objective factors changes the current action odds by factors $\exp(-0.623)$ and $\exp(-0.588)$, respectively. Their product is 0.298.

For panel C, let $\mu_i^0(z)$ be the normalized occupancy under exact neutral-prefix replay. The position-level statistic is

$$\overline{\text{TV}}_i = \sum_z \mu_i^0(z) \frac{1}{2} \sum_u |p_{\text{Full}}(u | z) - p_{\text{Local}}(u | z)|. \quad (38)$$

Panel C plots the empirical CDF of this prefix-conditional TV averaged over neutral-prefix occupancy; it does not first mix the two action distributions and then compute TV. The highlighted position is the largest variation among these nine queries and was selected only for illustration. Its occupancy-weighted TV is 0.250, whereas panel B uses one selected prefix with conditional TV 0.270. The displayed 19/224 count is descriptive. Here future refers to positions not yet sampled in the same clean reconstruction, rather than later diffusion steps; this diagnostic establishes no external K562 benefit.

Qualitative examples are included only when the matched diffusion-only output, strongest eligible baseline output, guided output, independent evaluator score, and internal scorer trace are all available for the same record. Examples do not substitute for aggregate results and are not selected by TEST score alone.

H.4 COMMONGEN COMPLETION WEIGHTING AND JOINT SAMPLING

This diagnostic reuses 256 official validation records selected before the component outcomes by concept count and tokenized concept length. Each arm uses the same records and three seeds with LLaDA-8B-Base, 32 generated tokens, denoising budget $b = 8$, and the same prompt and retained-support rule. Evidence, carrier-emission, and ancestral temperatures are (0.9, 0.3, 1.0). The target-free carrier is either the fitted 64-state WikiText HMM (H) or a one-state identity carrier (I). We recompile each record’s lexical DFA after generation and compute prompt-conditioned GPT-2-large PPL over the generated continuations. All 5,376 outputs are nonempty and included in both metrics.

The comparisons keep the carrier and the lexical controller fixed within each carrier setting. At a fixed query, let $g_0(v | s)$ denote the neutral action conditional and $h(v, s)$ the neutral mass of accepting completions after action v . Full assigns weight proportional to $g_0(v | s)h(v, s)$. Feasible keeps the neutral weight $g_0(v | s)$ only when $h(v, s) > 0$. It therefore removes dead ends without using the relative mass of the remaining completions. Neutral removes the terminal acceptance weight while retaining the same candidate graph. Full-marginal computes the exact single-token marginals of Full on the retained support at each fixed query, then draws the concurrently committed tokens independently. Once different tokens are committed, later denoiser queries and their supports may diverge.

Table 14: CommonGen component diagnostic on 256 reused validation inputs and three seeds per arm. PPL is the prompt-conditioned GPT-2-large corpus PPL over generated continuations. No output is excluded from scoring.

Carrier and sampling rule	Lexical coverage (%)	PPL ↓
H-Neutral	22.01	16.81
H-Feasible	100.00	20.28
H-Full	100.00	18.93
H-Full-marginal	83.98	18.34
I-Neutral	30.99	19.56
I-Feasible	100.00	23.71
I-Full	100.00	21.97

H–Full and H–Full-marginal differ in lexical coverage by 16.02 percentage points, with a 95% input-cluster bootstrap interval of [13.15, 18.75]. Both Full and Feasible attain 100% coverage under H and I. Relative to Feasible, Full reduces corpus token NLL by 0.0691 [0.0221, 0.1148] under H and 0.0764 [0.0319, 0.1235] under I; brackets again give 95% input-cluster intervals. Each of 5,000 bootstrap draws resamples the 256 inputs while keeping their three seed outputs together. The joint-versus-marginal result concerns lexical coverage, not a PPL gain. These are development diagnostics on reused validation records, not fresh held-out results. Unit ancestral temperature makes the joint and marginal laws directly comparable but differs from the main-table selected configurations. Their fixed-query exactness is conditional on retained candidate support, up to floating-point error; PPL measures an external language-model score rather than sentence quality.

I REPRODUCIBILITY AND EVIDENCE PROVENANCE

Each displayed value binds one task, backbone, cohort, method, budget, metric, and frozen configuration; values are not pooled across these contracts. Reproduction constructs the data roles in Tab. 10, trains or loads the TRAIN-only component, runs the DEV grids in Tab. 11, applies the deterministic selection rule, and evaluates the frozen configuration once. Algs. 1–4 specify the computations. Failed outputs remain in the denominator, and comparisons require shared task, split, prompt, evaluator, support, and budget contracts.

J RELATED WORK

Discrete diffusion and dependence modeling. D3PMs generalize discrete diffusion beyond uniform corruption and include an absorbing-state construction that connects diffusion with masked generation (Austin et al., 2021). Discrete Copula Diffusion supplements denoiser predictions with a separately trained copula model to restore dependencies between output variables and reduce the number of denoising steps (Liu et al., 2025). Chain-structured conditional random fields give a standard graphical-model treatment of conditional sequence dependence and dynamic-programming inference (Sutton & McCallum, 2012). These works motivate the use of structured dependence models inside discrete generation, while COFFEE separately represents the target-free dependence carrier and the sequence objective used for guidance.

Guidance for discrete diffusion. Existing methods steer discrete diffusion through intermediate predictors, continuous relaxations, or repeated evaluation of candidate outputs. Predictor-based methods estimate properties at noisy states and use those estimates to modify the reverse transitions (Nisonoff et al., 2025; Schiff et al., 2025), while NOS optimizes continuous denoiser representations (Gruver et al., 2023). SVDD evaluates the future value of candidate clean predictions (Li et al., 2025), and CSMC constructs a Metropolis–Hastings chain over complete clean samples (Phunyaphibarn & Sung, 2026). These approaches support broad classes of objectives, but require either a reliable signal at intermediate noise levels or repeated reward evaluation during sampling. Training such predictors also requires task-specific examples across the corruption process, where the attribute may be difficult to identify at high noise. COFFEE instead starts from a clean-sequence objective and compiles it into finite-state factors. This avoids a separate neural attribute predictor at every noise level when the objective admits a compact compiled representation.

Concurrent inference-time steering. Several concurrent methods steer frozen diffusion models through learned twists, local prediction corrections, or scheduling policies. CDM amortizes a twisted sequential Monte Carlo proposal with a learned twist (Kim et al., 2026), while TRI-TSMC iteratively fits the twist through trust-region updates (Wang et al., 2026). GILC modifies clean-prediction logits using reward information (Dou et al., 2026); DLM-SWAI applies precomputed token-level attribute biases (An & Han, 2026); and SAD steers the denoiser away from unsafe regions (Yusuf et al., 2026). DPRM instead uses a Doob-transform process reward to change token ordering (Bu et al., 2026), while MDM-VGB adds verifier-guided remasking and backtracking (Jeon et al., 2026). These approaches support broad objectives through learned twists, local corrections, ordering, or search. COFFEE targets objectives that admit compact finite-state factors and computes their continuation weights on the retained product graph.

Search for biological sequence design. Tree-guided diffusion has also been used for biological design. MP2D combines conditional diffusion, constrained Monte Carlo tree search, and iterative refinement for multi-objective protein design (Kong et al., 2026). DNA-CRAFT combines class-conditioned diffusion with Monte Carlo tree guidance for cell-type-specific regulatory DNA design (Awasthi et al., 2026). These methods explicitly search multiple denoising trajectories under external objectives, whereas COFFEE performs exact backward inference for the compiled objective within each retained fixed-step graph.

Future-aware control through tractable completion models. Autoregressive control has likewise used predictions or tractable models of future continuations. FUDGE trains a discriminator to predict whether a prefix will eventually satisfy an attribute (Yang & Klein, 2021). GeLaTo distills a hidden Markov model for tractable conditioning on lexical constraints (Zhang et al., 2023), while Ctrl-G pairs such a model with a finite-state logical constraint (Zhang et al., 2024). TRACE combines a distilled hidden Markov model with a lightweight attribute model to aggregate future attribute probabilities without sampling the continuations individually (Weng et al., 2025). COFFEE extends this completion-based view to a diffusion step in which unresolved variables may occur anywhere in the sequence and must be treated as one joint clean reconstruction. It also compiles count-additive soft preferences into weighted state transitions, so the same backward-message algorithm supports both hard acceptance and soft reward.

Compiled representations for structured inference. Knowledge compilation studies representations that make otherwise expensive queries tractable (Darwiche & Marquis, 2002). A probabilistic circuit is a directed computation graph that represents a distribution through sums and products. Under appropriate structural compatibility conditions, circuit operations such as products and marginalization remain tractable (Vergari et al., 2021). Semantic Probabilistic Layers use this structure to combine neural predictions with logical constraints (Ahmed et al., 2022), and Neurosymbolic Diffusion Models use discrete diffusion to capture dependencies among symbols inside a neuro-symbolic predictor (van Krieken et al., 2025). CoDD introduces a tractable probabilistic layer that restores cross-position dependence to factorized diffusion-language predictions (Li et al., 2026). For sequence objectives, weighted automata provide a finite-state algebra (Mohri, 2009), while Aho–Corasick automata retain the suffix information needed to count overlapping pattern occurrences (Aho & Corasick, 1975). Recent constrained diffusion methods use dynamic programming or finite automata to enforce hard regular constraints (Suresh et al., 2025; Dang & Ermon, 2026). COFFEE composes a target-free dependence carrier with a separately compiled objective and derives one product-state message-passing and sampling algorithm for hard and soft sequence guidance.